

Pump construction


End Suction, for the lowest NPSH required. Top discharge, center line mounted, for high stability in heavy duty, bare frame mounting, close couple on request.

Connections:

Universal flanges accordin to DIN Norms Class PN16-25-40 & ANSI B16.5 Class 300.

Other on request.

Performance curves

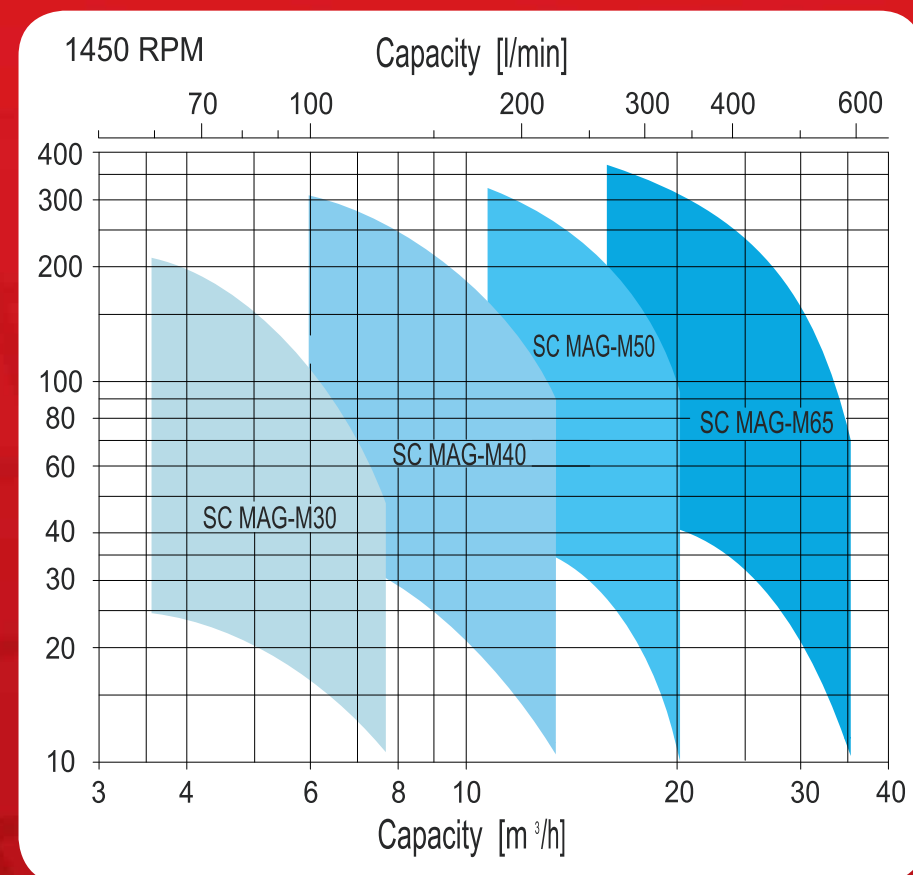

Operating Limits

- Max viscosity:
200 cSt
- Max system pressure:
50 bar
Higher pressure version available
on request.
- Flow up:
to 35 mc/h
- Head up:
to 360 m
- Temperature range from:
-40 °F (-40 °C)
to +482 °F (+250 °C)
- Electric motors:
from 2,2kW
up to 132kW
- Available ATEX II - / 2G cbk II C
T2-T5

REGENERATIVE SIDE CHANNEL MULTISTAGE METALLIC MAG-DRIVE PUMPS



SC MAG-M

Manufactured by:



A unit of
Mischiatti
GROUP

M PUMPS s.r.l. - Via dell'Artigianato, 120
45015 Corbola (Ro) - Italy - www.mpumps.it
Tel. +39 0426 346304 - Fax +39 0426 349126

For more information please contact:



SC MAG-M Series

The hermetic sealless is the most convenient and safety solution for refineries, chemical and petrochemical industries, refrigeration and heat engineering, liquid gas plants, galvanic engineering, power stations and solar thermal fields, tank installations, pharmaceutical industries, fibers industries.

A wide range of pumps covers the different performances.

Low NPSH pumps (0,5m) and selfpriming capability make this pump ideal for loading and unloading applications.




PUMP DETAILS

The hydraulic barrier between two stages is made of special bushing.

"Barrel" construction, with back inserted volute rings, to have the best hydraulic alignment and the longest wear rings life. Available from 1 to 8 stages.

Particular design of the hydraulic, with self balancing impeller.

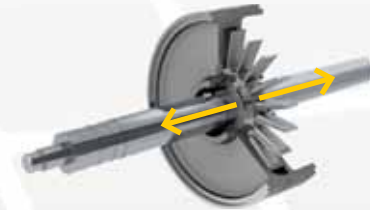

The range includes the construction from 1 to 8 stages, with inducer to minimize the required NPSH up to 0,5m, to allows the pumping of condensate and generally all low available NPSH installations.


CF8M high quality casted pump casing, suction, discharge volutes and impellers.

Materials:
- Hastelloy®,
- Incoloy®,
- Duplex,
- Others available on request.

Field assembling of the product lubricated bearing arrangement does not require special tools.

Available bearing materials in different types to provide the best solution for each application: Silicon Carbide (SSIC), Tungsten Carbide (TC), Metallized Carbon.

The adoption of elastic rings reduces the sleeve bearing loads and the thrust bearing loads to the minimum, to guarantee many years of maintenance-free operation.

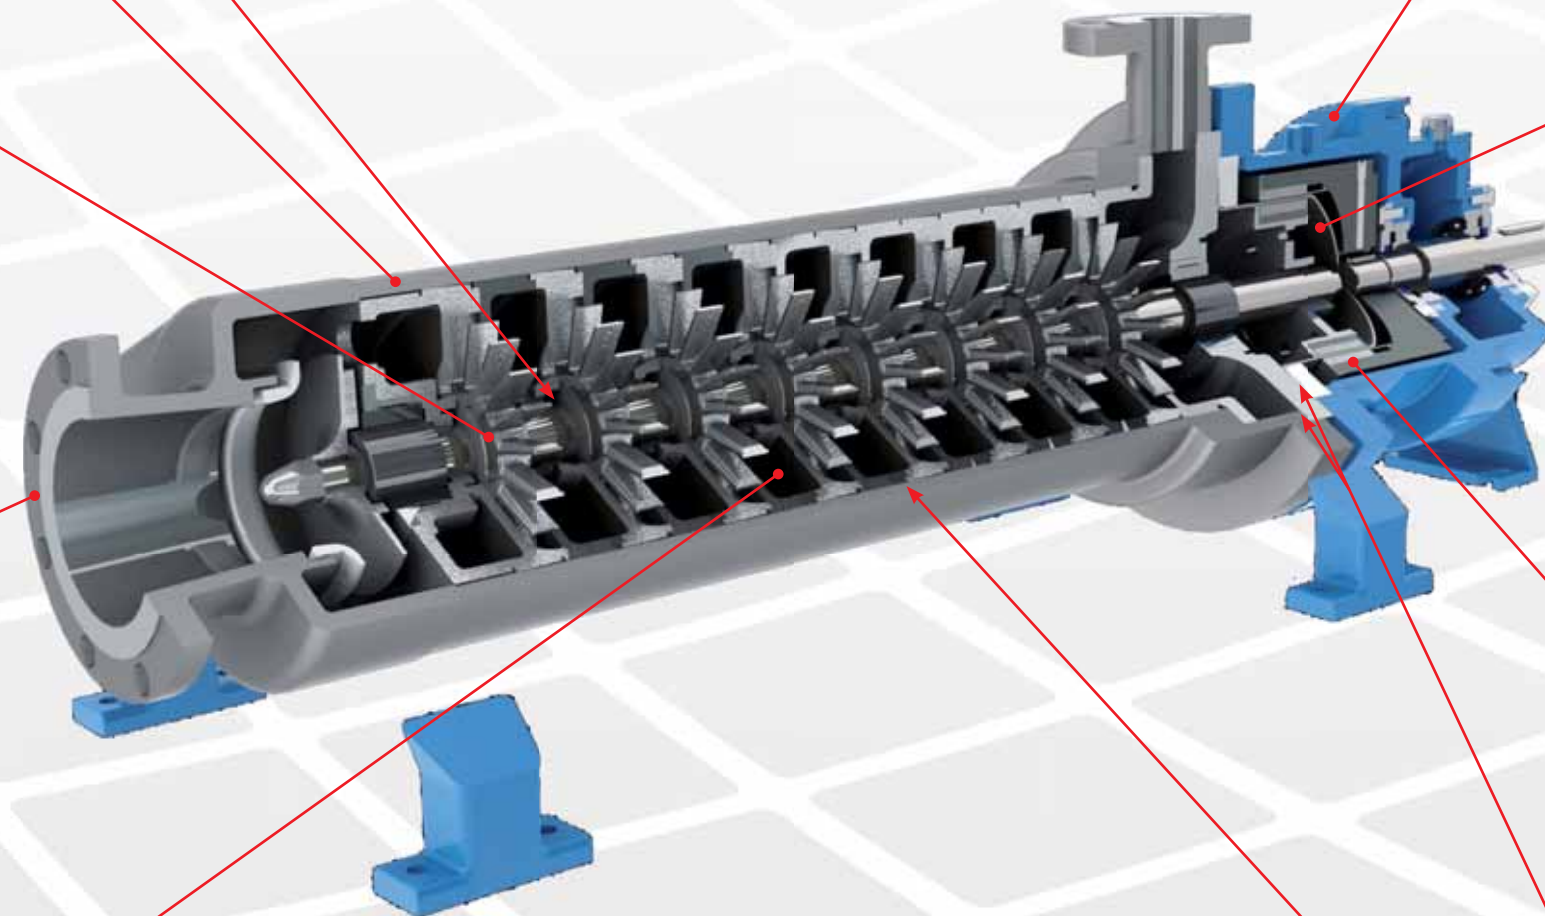

Epoxy primer and polyacrylic enamel water-based painting for the best quality resistance linked to the environmental respect.



The rear shell is made of one single piece, no welding, ellipsoidal profile that has been studied to withstand higher pressures than the traditional one.

Standard construction with Hastelloy® C276 for pressure up to 50 bar.

Titanium Alloy is an upgrade when higher pressure ratings and increased efficiency are required.



High power synchronous magnetic coupling designed by our technical office and with rare earth magnetic elements mechanically locked.

The high performance magnets can be operated at liquid temperatures of up to 572°F (300 °C) without external cooling.

Sealing system with flat gaskets prevents product from leaking to the atmosphere – different materials available:

- Asbestos free (standard)
- PTFE
- Graphoil
- GYLON®
- Other on request

Intermediate special gaskets.



michael smith
engineers ltd

The UK's leading pump specialist

**VIKING
PUMP**

A Unit of IDEX Corporation

Viking Gear Pumps

Liquiflo®

Liquiflo Gear Pumps



FINISH THOMPSON INC.

Finish Thompson Drum & Centrifugal Pumps

MICROPUMP®

Micropump Gear Pumps

**OFFICIAL
DISTRIBUTORS**

FOR:



Codip Air Operated PTFE Diaphragm Pumps

WANNER
Hydra-Cell
Seal-less Pump Technology

Hydra-Cell High Pressure Diaphragm Pumps

HNP M
HNP Mikrosysteme

HNP Gear Pumps

ISMATEC®

Ismatec Peristaltic Pumps

FMI FLUID METERING, INC.

Fluid Metering Piston Pumps



M Pumps, Centrifugal,
Turbine and Vane Pumps



Michael Smith Engineers Tel: 0800 316 7891

www.michael-smith-engineers.co.uk

Info@michael-smith-engineers.co.uk