


Design feature

- No coupling alignment
- Less space requirement
- No leakage, sealless
- True secondary containment
- No roller bearings
- CG93 Slide bearings
- Electric bearing Monitor
- Less noise and vibration


Benefit

- saving costs during installation
- saving costs
- saving costs
- maximum safety
- reducing maintenance costs
- increased bearing life
- reduced downtime
- less impact in the workplace


Other Pump Designs

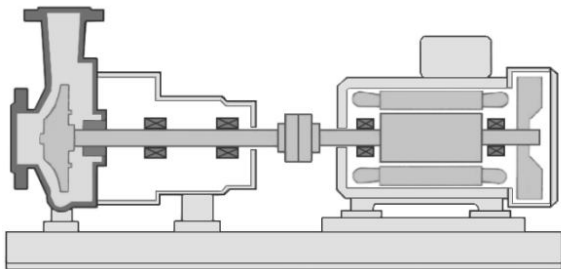

Centrifugal pump with shaft seal

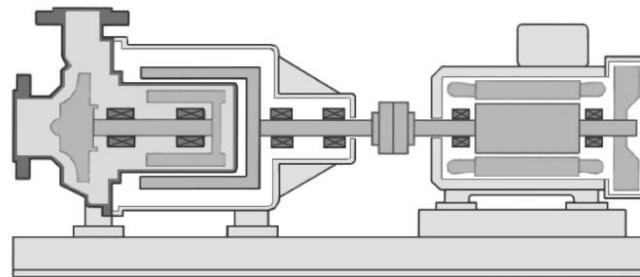

Centrifugal pump with magnet drive (end coupled)

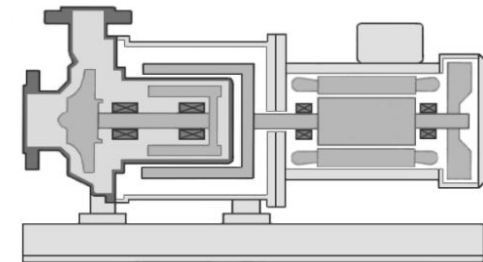

Centrifugal pump with magnet drive (close coupled)

