


Series SLH-5G

Hygienic Twin Screw Pumps



ITT Bornemann - The Pump Pioneer

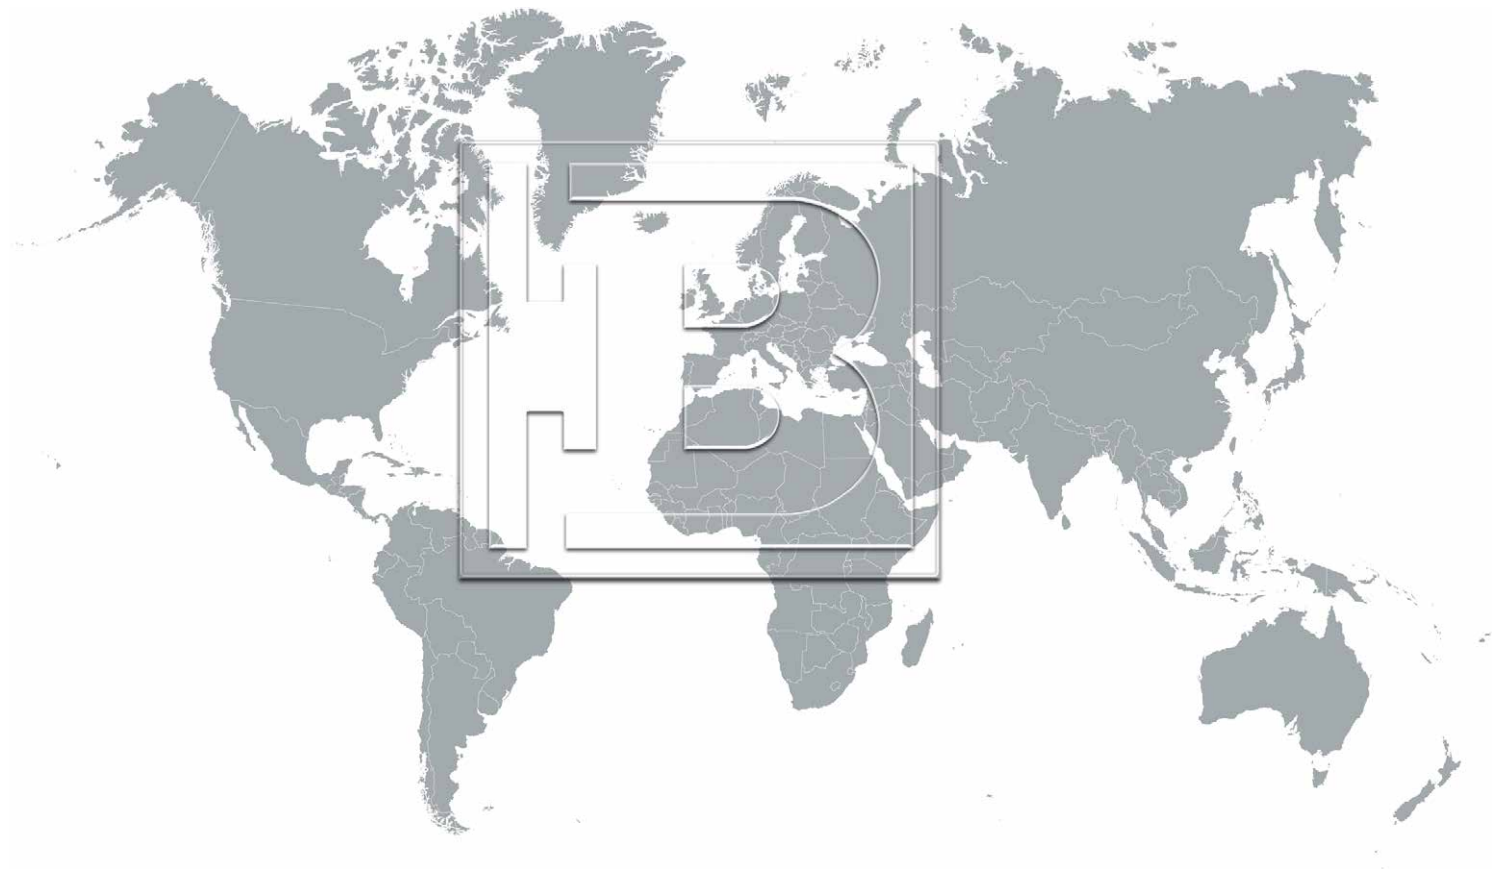


Over 15,000 Successfully
Installed SLH Pumps Worldwide

We are ITT Bornemann, the first to market German based supplier of Twin Screw Pumps and an established worldwide leader of numerous ground-breaking pump developments. Originally founded in 1853, we joined ITT Inc. in 2012, a diversified leader of highly engineered solutions for the energy, transportation and industrial markets.

In 2004, Bornemann introduced the hygienic SLH design of Twin Screw Pumps to the Food & Pharma industries. Its design is based on more than 170 years of proven technology of Bornemann Industrial Twin Screw Pumps, aligned with the special hygienic requirements of Food, Pharma and Chemical operations. It has been continuously improved to meet the requirements of our global customers.

The Operating Principle

SLH Twin Screw Pumps are rotary positive displacement pumps, using two screws to convey the product along the screw axis. The contact free intermeshing screws and the housing are forming closed chambers, constantly moving product from suction to discharge side.

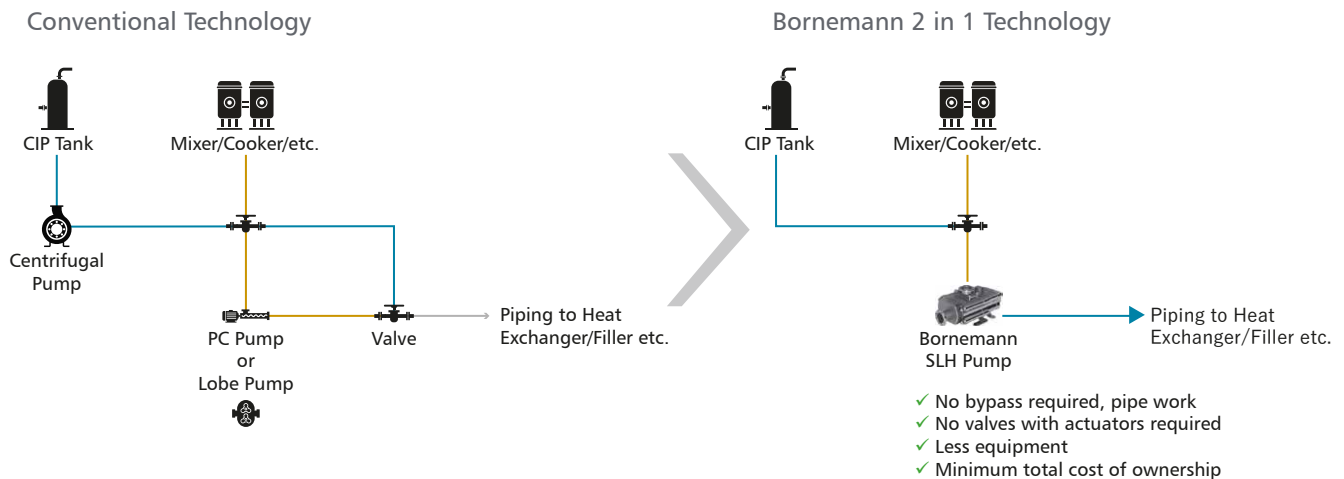

Convey & Clean with One Pump Only

Bornemann SLH pumps combine advantages of a conventional positive displacement pump with the performances of a centrifugal pump. It conveys low and high viscous products and achieves the required flow velocity for cleaning. This eliminates the need for a second pump and reduces valves, piping and controls.

Product Integrity

The axial conveyance and the non-contact working principle protects the product and maintains its size, surface and visual integrity. Sheer sensitive handling of the product are major advantages of the SLH operating principle.

Operating Envelope

Different combinations of rotor diameter and pitch fit customer requirements. Bornemann SLH pumps operate at a wide range of speed, providing flexibility for different operating points including CIP parameters.

Low Pulsation

Bornemann Twin Screw pumps operate nearly pulsation-free to avoid vibration of piping systems and to secure safe system layout, particularly for aseptic conditions.

Hygienic Design

State of the art hygienic design with contact-free operation of the rotor, no dead ends and self-draining design guarantee sanitary and aseptic standards and protect production and product.

Dry Running

Due to non-contact working principle of the rotors and flushed seal configuration, Bornemann SLH is able to run dry for a defined period of time for increased system safety even at low tank levels.

Long Service Life

Bornemann SLH pumps feature no metal-to-metal contact between rotors and housing, which secures trouble-free conveyance even for abrasive product and minimized downtime.

Pump Features

Bornemann SLH-5G Series provides more flexibility and reduced life-cycle costs. The design options and the technical features are engineered to provide system compatibility under adjustable operating conditions while maintaining the high Bornemann quality and hygienic standards.

Connections

S-line (Tri-Clamp)

DIN 11851

DIN 11864-2

SMS 1146

Others available upon request



Performance Boost

Bornemann Pump Series SLH-5G provides enlarged performance by increasing the size of the hydraulic. Better performance with the same reliability Bornemann is known for.

Continuous Technical Developments

Bornemann uses the experience of previous generations and market developments to optimize the pump design in:

- Efficiency
- Thermal Shocks
- Flexibility in Connection
- Internal Feeding Solutions

Seals Options

Single Mechanical
Double Mechanical
Chocolate Design
Knife-Edge



Materials

Product-contact 316L SS
Surface Finish $<0.8\mu\text{m}$ / 32 RA
Diffusion hardening for abrasion resistance
Others available upon request

Options

Heating/Cooling Casing Jacket
LipSeal Protect Coating
Thermal Resistance Option

Built-in Exchangeability

SLH-5G design allows a built-in exchange with all predecessor Bornemann SLH-Series pumps without additional adaptations. Enabling easy drop-in and replacement with previous generations and installed piping dimensions.

Excellent Maintenance Design

The newly patented* Bornemann design without disassembly of the bearing unit for efficient maintenance.

**US 11,598,333 B2*

User Advantages

Bornemann Pump Series SLH-5G provides safe and efficient operations for continuously increasing demands in hygienic environments. This allows Bornemann to offer you the ideal solution for every application.

Product Protective Procedure

To avoid any waste of the product, the reverse operation allows to empty the suction piping from the product, before starting the cleaning process.

Highly Sterile

The conveying process with sterilized products is supported by a vapor barrier, designed to ensure the sterile condition of the product.

Abrasive Conveying

Different material options allow for conveyance of abrasive products and avoid contamination of the product.

Stable Temperature

Heating jackets provide a constant temperature of the product to allow for an efficient and gentle conveyance.

High Temperature Differences

The design and material choices allow maximum temperature differences from 4°C to 95°C (39°F to 203°F), empowering a problem-free, high temperature cleaning process subsequent to the conveying process

Constant Flow

The optimized backflow screw selection guarantees constant flow rates for metering or feeding UHT to ensure a constant temperature level despite variation in pressure or viscosity.

High Viscosity

The open suction layout allows a seamless alignment directly to the collection unit of the pumped product to provide the best possible reception of highly viscous products.

Typical Applications



Nutrition & Health

Soups, stews, tomato paste, vegetables, dressings, chocolate, fats & oils, batters, cream fillings, brewery, wort, soft/fruit drinks, meat processing



Dairy Processing

Cream, milk, cheese curd & whey, cottage cheese, yogurt



Pharmaceutical/Cosmetics


Pill pastes, syrups, extracts, slurries, face creams & lotions, hair styling gels & liquids, dyes & alcohols, soaps & cosmetics





High Viscosity

Solvents, paints, fuels, resins, polymers & sludges, oil & lubricants


Pump Design

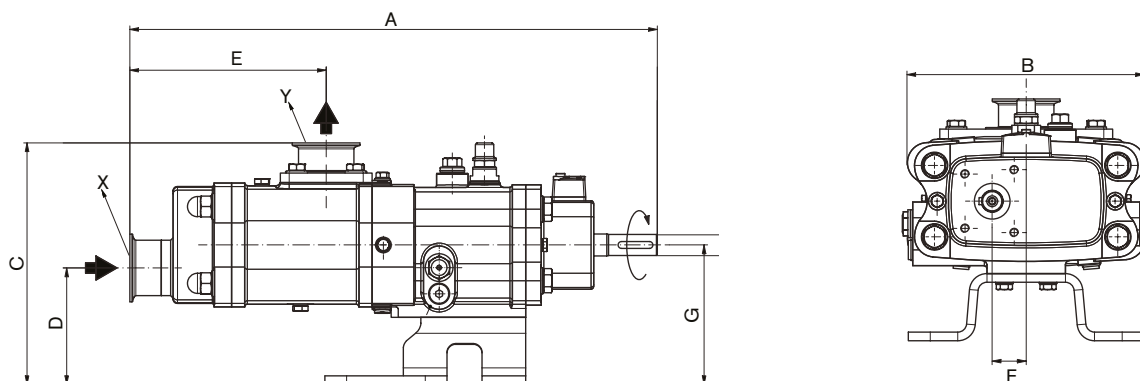

	A	B	C	D	E	F	G	X & Y	Weight
	in / mm								lb / kg
1000	22.91 582	10.71 272	8.62 219	2.91 74	7.64 194	1.54 39	3.94 100	DN50-DIN11851, 2-Triclamp	176 80
2000	23.82 605	10.71 272	9.80 249	3.90 99	8.86 225	1.54 39	5.20 132	DN65-DIN11851, 2,5-Triclamp	176 80
3000	27.48 698	13.07 332	12.28 312	4.92 125	10.83 275	1.87 47.5	6.3 160	DN80-DIN11851, 3-Triclamp	291 132
4000	34.65 880	15.91 404	16.53 420	6.50 165	13.78 350	2.42 61.5	7.09 180	DN100-DIN11851, 4-Triclamp	595 270

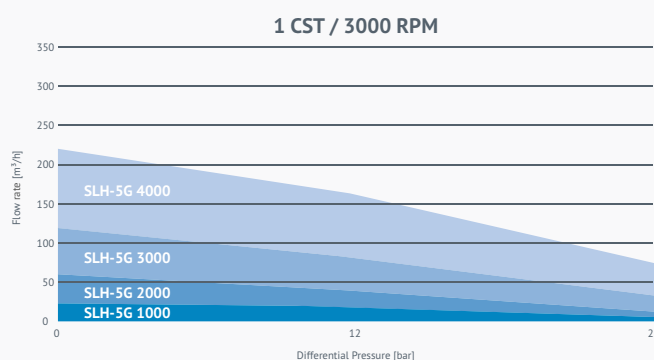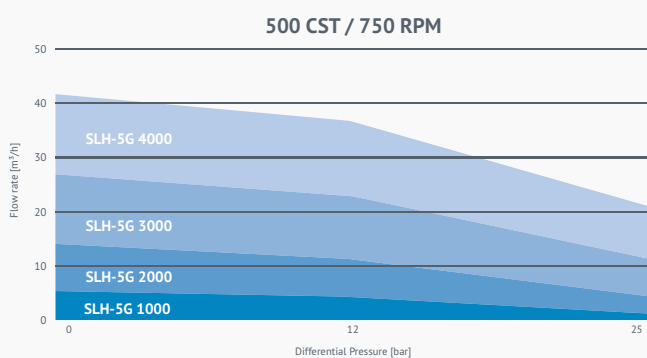

	Max. Flow		Max. Differential Pressure		Max. Viscosity		Max. Product Temperature		Max. NPSHR
	m³h	gpm	bar	psi	mm²/s	cSt	°C	°F	m
1000	20	88	25	363	1.000.000		175	347	-8,5
2000	50	220	25	363	1.000.000		175	347	-8,5
3000	100	440	25	363	1.000.000		175	347	-8,5
4000	200	881	25	363	1.000.000		175	347	-8,5

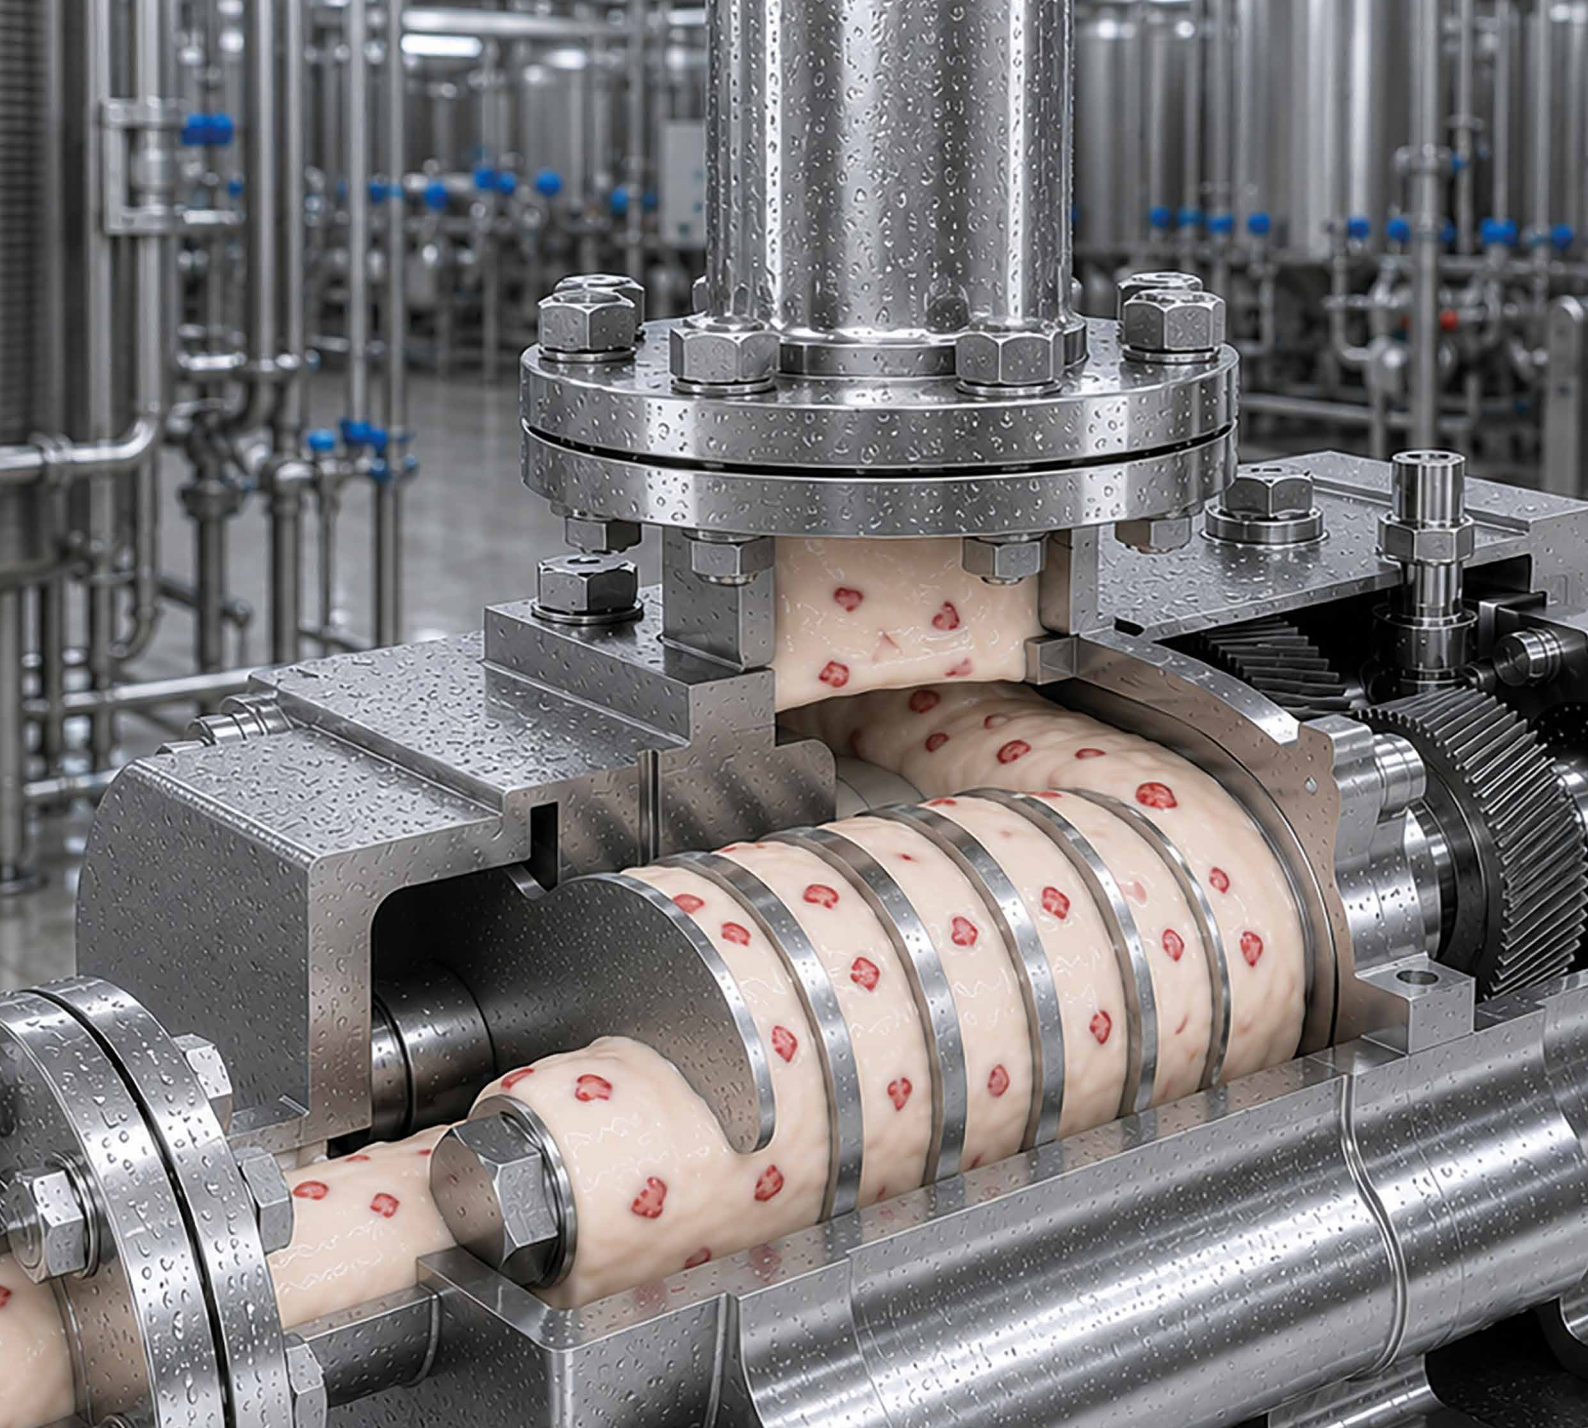

OFFICIAL UK DISTRIBUTOR:



Michael Smith Engineers Limited
www.michael-smith-engineers.co.uk
info@michael-smith-engineers.co.uk
0800 316 7891



Bornemann

— An ITT Company