

Product information

Filter series F-MI3 · Filters



Description

Filters are used in fluidic systems to protect sensitive components from damage due to contamination and particles. For the safe operation of micro annular gear pumps and their precision-machined rotors, the use of a 10 µm meshed filter is recommended. With compact filter units made out of corrosion-resistant materials, with high filtration performance and different mesh sizes, HNP Mikrosysteme offers suitable filter solutions for all of its pump series.

The filter series F-MI3 is available in three different configurations. The »inlet filter«, without an external housing, is directly immersed in the liquid. The »inline filters« are designed to be installed downstream in the feed line, i.e. directly before the pump. The maintenance-friendly »T-design« offers the advantage of changing the filter element without having to uninstall the filter from the feed line, and the option to open the bottom for releasing medium or emptying the filter. Also, it is possible to implement a sensor for filter monitoring. This allows to detect pending maintenance or cleaning of the filter as well as a closed supply line. In the »T-version« the sensor is directly adaptable, for straight filters it can be integrated by adding a separate mounting block. To avoid sedimentation and cross-contamination the filters have small dead volumes and are manufactured with smooth surfaces (Ra 0.8).

Advantages

- Corrosion-resistant materials: stainless steel 316L or alloy C22 and FPM, FFPM or EPDM
- Metal filter elements: without solder or adhesives
- High filtration performance and small size: pleated filter elements for low pressure drops even at high flow rates and viscosities
- Wide configuration variety: different body shapes and body materials, filter fineness and sealing materials
- User-friendly and economical: filter elements can be cleaned or replaced

Technical data

Type	Inlet filter Inline filter (straight, T-shape)
Liquid temperature range	Inlet filter: -200 ... +275 °C [-328 ... +527 °F] Inline filter: -10 ... +140 °C (-50 ... +275 °C) * [+14 ... +284 °F (-58 ... +527 °F)] *
Differential pressure range	Inlet filter: - Inline filter: max. 10 bar [145 psi]
Operating pressure	Inlet filter: - Inline filter: max. 200 bar [2900 psi]
Seal materials	Inlet filter: - Inline filter: FPM, FFPM, EPDM
Materials	Inlet filter: stainless steel 316L; optional: alloy C22 Inline filter (straight): stainless steel 316L Inline filter (T-shape): stainless steel 316L; optional: alloy C22
Internal volume	Inlet filter: - Inline filter (straight): 65 ml [3.97 in ³] Inline filter (T-shape): 84 ml [5.13 in ³]
Measurements (Ø x H)	Inlet filter: Ø 35 x 84 mm [Ø 1.378 x 3.307 in] Inline filter (straight): Ø 48 x 105 mm [Ø 1.890 x 4.134 in] Inline filter (T-shape): Ø 70 x 114 mm [Ø 2.756 x 4.488 in] (Servicing height for filter element exchange 205 [8.07])
Fluid connection	conical internal thread 3/8" NPT
Filter fineness	10 µm; optional: 3 µm, 25 µm, 40 µm, 100 µm **
Filter area	135 - 150 cm ² [20.9 - 23.3 in ²] ***
Weight	Inlet filter: approx. 175 g [6.17 oz] Inline filter (straight): approx. 1030 g [36.33 oz] Inline filter (T-shape): approx. 1700 g [59.97 oz] **
Remarks	* depending on seal material ** depending on material *** depending on filter fabric


Notice

Even if single parameters are within the indicated performance range of technical data, certain parameter combinations may not be achievable. Single parameters may exceed their indicated performance range under adequate circumstances. For detailed evaluation please contact HNP Mikrosysteme. Actual performance may vary. Specifications are subject to change without notice.


Accessories

- Filter Monitoring

Functional principle

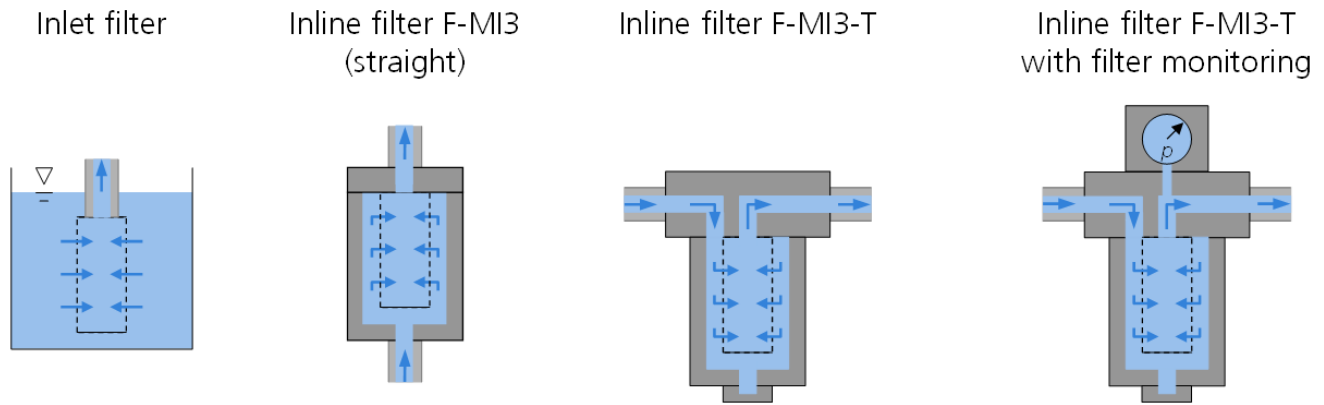


Characteristics

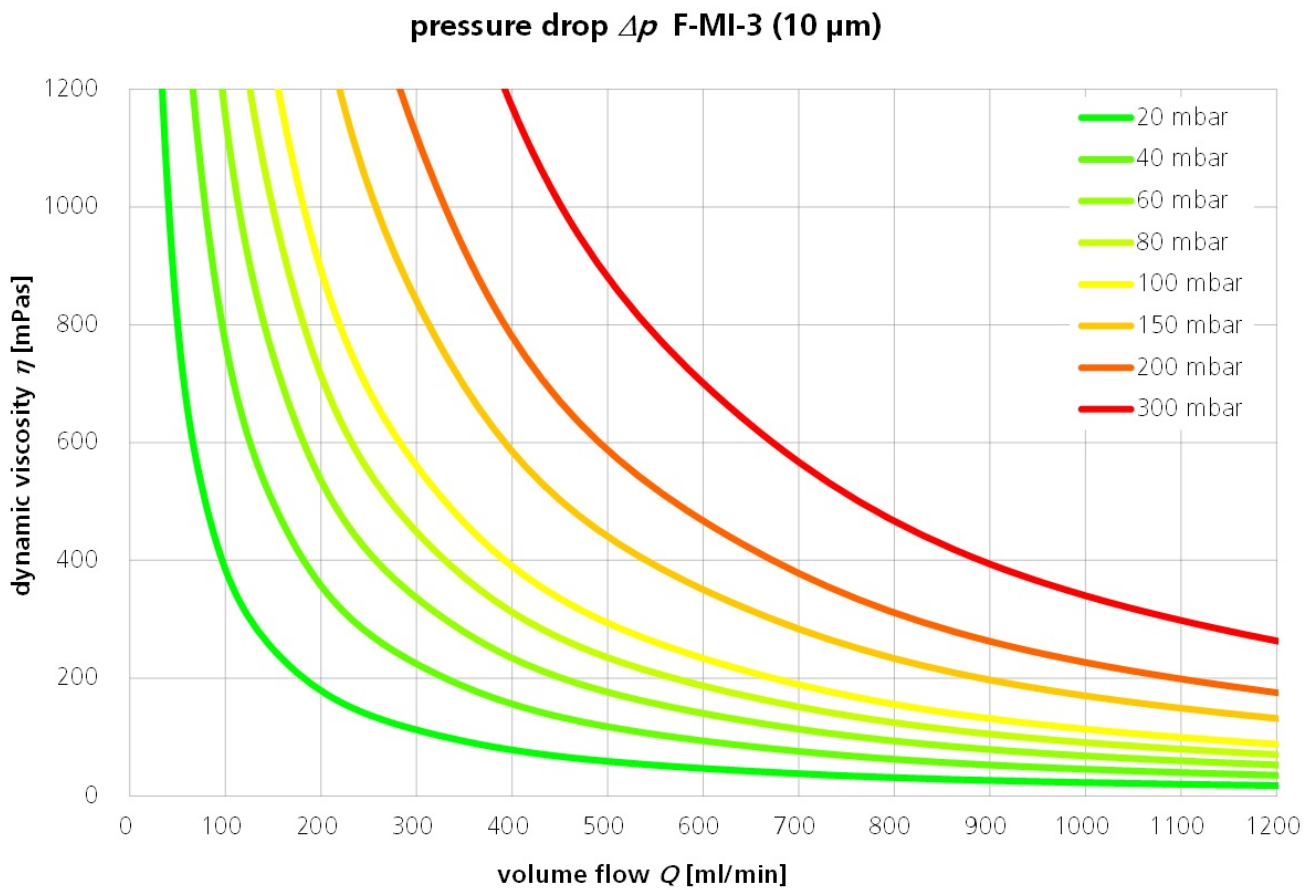


Dimensions


Inlet filter
F-MI3

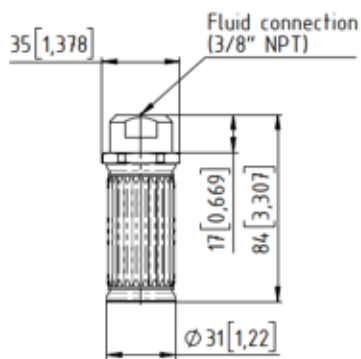


Inline filter
F-MI3

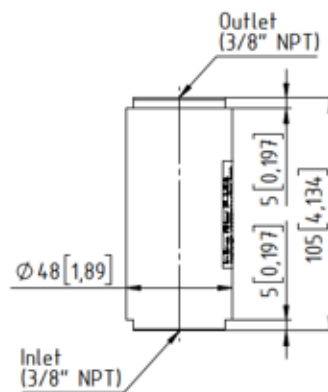

Inline filter
F-MI3-T

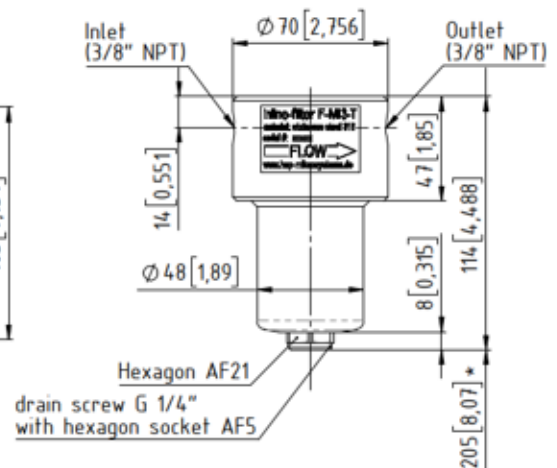

* Servicing height for filter element exchange

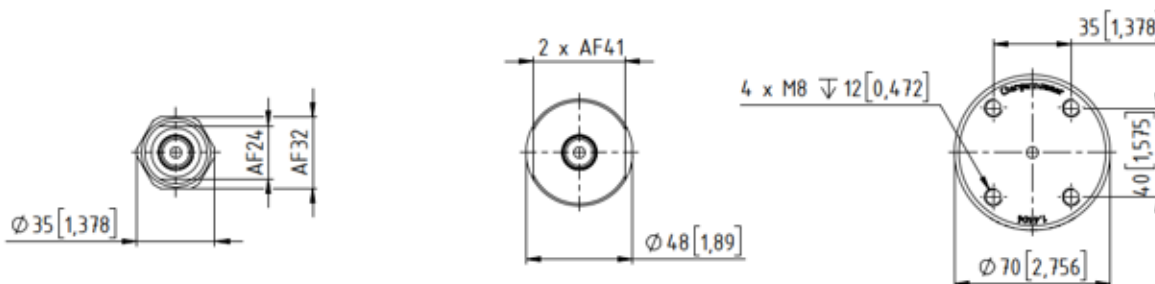

Dimensions are millimeters next to [inches]

Accessories

- Electrical heating module
- Filter monitoring
- Mounting bracket (for Inline filter in T-shape)

Patents and trademarks

Micro annular gear pumps (and housings) are protected by assigned patents: EP 1 354 135 B1; US 7,698,818 B2; DE 10 2011 001 041 B4; CN 103 348 141 B; US 10,012,220 B2; CN 103 732 921 B; US 9,404,492 B2; US 6,520,757 B1.

HNP M[®], mzi[®], MoDoS[®], μ -Clamp[®], μ Dispense[®], Centifluidic Technologies[®], LiquiDoS[®], smartDoS[®], colorDoS[®] are registered German trademarks of HNP Mikrosysteme GmbH.

Contact

HNP Mikrosysteme GmbH
Bleicherufer 25
19053 Schwerin
Germany

T +49 385 52190-300
F +49 385 52190-333
sales@hnp-mikrosysteme.de

Last update 2021/02