



Product summary


Micro annular gear pumps

High performance series, low pressure series



Micro annular gear pumps

Technology	<ul style="list-style-type: none"> Precise dosage Compact dimensions Pulseless delivery Lowest flow rates Low shear stress 	<ul style="list-style-type: none"> Suitable for non-lubricating liquids DC-drives Long service life due to tungsten carbide and ceramic components Large choice of accessories
Series	<h4>Low pressure series</h4>  <p>m zr-7223 m zr-4622 m zr-2921 m zr-2521</p>	<h4>High performance series</h4>  <p>m zr-11508 m zr-7205 m zr-4605 m zr-2905</p>
Applications	<ul style="list-style-type: none"> Analytical instrumentation Biotechnology Fuel cells 	<ul style="list-style-type: none"> Chemical processing Industrial and plant engineering Packaging and dosage
Specification	<ul style="list-style-type: none"> compact dimensions low pressure range low viscosity liquids DC-motor with graphite brushes 	<ul style="list-style-type: none"> industrial equipment medium pressure range low/high viscosity liquids integrated, programmable controller

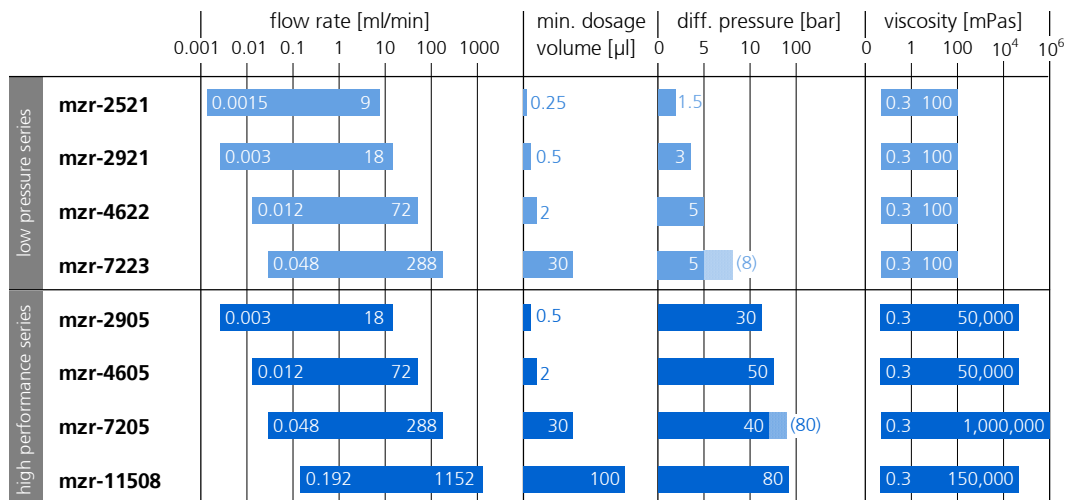

The material property of a liquid (e.g. viscosity, lubricating property, particle content, corrosiveness) impacts the technical data and the service life of pumps.
At appropriate conditions the characteristic values may be increased or decreased.

Contact

HNP Mikrosysteme GmbH
Juri-Gagarin-Ring 4 · D-19370 Parchim

phone +49| 3871| 451-301
fax +49| 3871| 451-333

e-mail info@hnp-mikrosysteme.de
http://www.hnp-mikrosysteme.de

Product characteristics micro annular gear pumps

Pump series Pump size	High performance				Low pressure					
	2905	4605	7205	11508	2521	2921	4622	7223		
1. Construction										
Displacement volume [μl]	3	12	48	192	1.5	3	12	48		
Measurements [mm] [inch]	L x W x H or Ø x L L x W x H or Ø x L, ca.	140 x 45 x 65 5.5 x 1.8 x 2.6	143 x 45 x 65 5.6 x 1.8 x 2.6	155 x 50 x 69 6.1 x 2.0 x 2.7	309 x 108 x 124 12.2 x 4.3 x 4.9	Ø 13 x 75 0.51 x 2.95	Ø 13 x 75 0.51 x 2.95	Ø 16 x 87 0.63 x 3.50	Ø 25 x 147 0.98 x 5.12	
Weight [g] [lbs]		780 0.354	800 0.363	1080 0.490	ca. 8000 ca. 3.63	56 0.025	56 0.025	100 0.045	370 0.168	
Internal volume [μl]		85	109	525	8506	65	67	85	238	
Gear material	Tungsten carbide (WC-Ni)	●	●	●	●	●	●	●	●	
Case material	Stainless Steel	316L (1.4404/35)	316L (1.4404/35)	316L (1.4404/35)	316L (1.4435)	⊙	⊙	⊙	⊙	
	Nickel silver	–	–	–	–	●	●	●	●	
	Epoxy resin	–	–	–	–	●	●	●	●	
Bearing material	Tungsten carbide (WC-Ni)	●	●	●	●	⊙	⊙	⊙	⊙	
	Ceramics Al ₂ O ₃	–	–	–	–	●	●	●	●	
Dynamic seal material	PTFE graphite reinforced	●	●	●	●	●	●	●	●	
Static seal material	FPM (Viton®)	●	●	●	●	●	●	●	●	
	EPDM	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
	FFPM	⊙	⊙	⊙	⊙	⊙	⊙	⊙	⊙	
Fluid connection	Slip fittings	–	–	–	–	2 mm	2 mm	2 mm	5 mm	
	Manifold assembly	–	–	–	–	⊙	⊙	⊙	⊙	
	1/4" -28 UNF	●	●	–	–	–	–	–	●	
	1/8" NPT	–	–	●	–	–	–	–	–	
	3/8" NPT	–	–	–	●	–	–	–	–	
Tubing-ID		1/16"	1/16"	4 mm	10 mm	1/16"	1/16"	1/16"	1/16", 4 mm	
Tubing-OD		1/8"	1/8"	6 mm	12 mm	1/8"	1/8"	1/8"	1/8", 6 mm	
Shaft coupling	Bellow type	●	●	●	●	–	–	–	–	
	Rubber type	–	–	–	–	●	●	●	●	
2. Characteristics										
Flow rate Q [ml/min]	min.	0.003	0.012	0.048	0.19	0.0015 *	0.003 *	0.012 *	0.048	
	max.	18	72	288	1152	9	18	72	288	
	[l/h]	max.	1.08	4.3	17.28	69.12	0.54	1.08	4.32	17.28
Min. dosage volume [μl]		0.5	2	30	100	0.25	0.5	2	30	
Differential pressure [bar]	(for viscosity 1 mPas)	5	10	40 (80 *)	80	1.5	3	5	5 (8 *)	
	[psi]	73	145	580 (1160 *)	80	22	44	73	73 (116 *)	
Differential pressure [bar]	(for viscosity 16 mPas)	30	50	40 (80 *)	5	1.5	3	5	5 (8 *)	
	[psi]	435	725	580 (1160 *)	10 - 40 *	22	44	73	73 (116 *)	
Max. inlet pressure [bar]		5	5	5	5	1	1	1	1	
	[psi]	73	73	73	73	15	15	15	15	
Viscosity □ [mPas]	min.	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	
	max.	50,000	50,000	50,000	150,000	100	100	100	100	
	with accessories			1,000,000		1,000	1,000	1,000	1,000	
Precision CV [%]		< 1	< 1	< 1	< 1	1	1	1	1	
Pulsation [%]		6	6	6	6	1.5	6	6	6	
NPSH _R [m]		0.9	5.7	0.5		0.6	0.6	0.5	0.4	
	with accessories	0.4	0.5	0.5		–	–	–	–	
Operating temperature [°C]	min.	-5	-5	-5	-5	-20	-20	-20	-20	
	max.	60	60	60	60	60	60	60	60	
	with accessories	150	150	150	120	–	–	–	–	
3. Accessories										
Console drive module		mzr-S05 (E)	mzr-S05 (E)	mzr-S05 E	–	mzr-S06	mzr-S06	mzr-S06	mzr-S06 E	
Fluidic seal module		●	●	●	●	–	–	–	–	
Heat isolation module		●	●	●	●	–	–	–	–	
Heating module		●	●	●	●	–	–	–	–	
Double shell heating module		●	●	●	●	–	–	–	–	
Gear box		–	●	●	●	●	●	–	–	
Dosage module		●	●	–	–	●	●	–	–	
Bypass module (1/2/6 port)		⊙	⊙	–	–	●	●	●	–	
4. Drive										
DC-Motor with graphite brushes		–	–	–	–	18V / 3W	18V / 3W	24V / 4.5W	24V / 20W	
DC-Motor brushless	mzr-xx06	–	–	24-48V / 200W	–	⊙	⊙	⊙	⊙	
DC-Servomotor	mzr-xx05	24V / 44W	24V / 44W	24V / 44W	–	–	–	–	–	
	mzr-xx08	–	–	24V / 201W	42V / 368W	–	–	–	–	
AC-Motor, three-phase	mzr-xx07	–	–	400V / 140W	400V / 400W	–	–	–	–	
DC-Explosion-proof motor	mzr-xx09	24V / 50W	24V / 50W	24V / 50W	–	–	–	–	–	
5. Control										
Discrete dosage and continuous delivery	mzr-xx05	integrated	integrated	integrated	–	S-ND	S-ND	S-ND	S-HD	
	mzr-xx08	–	–	S-HP	S-HP	–	–	–	–	
	mzr-xx09	S-HD	S-HD	S-HD	S-HD	–	–	–	–	
Continuous delivery	mzr-xx06	–	–	S-HV	–	S-KG-21	S-KG-21	S-KG-22	–	
	mzr-xx07	–	–	S-FI	S-FI	S-KD-21	S-KD-21	S-KD-22	S-KD-23	
	mzr-xx08	–	–	S-HV	S-HV	–	–	–	–	

Values are valid for standard version. Customized solutions on request.

Depending on liquid viscosity and pump configuration values for pressure and precision may differ from those mentioned above.

Legend:

- applicable / available
- ⊙ option / customized solution
- not applicable / not available
- * with accessories

CV Coefficient of Variation
NPSH_R Net Positive Suction Head Required
Teflon® is a registered trademark of DuPont.
Viton® is a registered trademark of DuPont Dow Elastomers.