

Magnetic Hermetic Series

Micro annular gear pump mzr®-7265

Compact hermetic pump for continuous dosage



- **Hermetic pump design**
pump without shaft seal
- **Magnetic drive**
inner magnet system driven by rotating magnetic field
- **Integrated motion controller**
programmable motion controller for speed and position control with RS-232 interface
- **Compact dimensions**
length 84 mm
- **Long service life**
wear-resistant, ultra-hard materials

The micro annular gear pump mzr-7265 is suitable for handling crystallizing, oxygen or moisture sensitive liquids, because the pump has no shaft seal. This functionality is made possible thanks to a liquid-separating cup surrounding the magnetic drive. The compact dimension of this

magnetic hermetic pump is achieved by a completely new product design and optimal matching with an integrated speed and position controller. The pump has a length of 84 mm and a weight of 580 g. The pump handles flow rates from 0,048 to 288 ml/min with a high precision

and low pulsation. The pump is suitable for applications where an avoidance of leakage and a long service life as well as low energy consumption are important requirements. The pump is supplied with a terminal box for speed control and LED status indicator.

Applications

- Fuel cells
- Dosing of AdBlue
- Biotechnology
- Marine technology
- Metering of liquefied gases
- Aerospace industry
- Mobile analytics

Even if single parameters are within the indicated performance range of technical data, certain parameter combinations may not be achievable. Single parameters may exceed their indicated performance range under adequate circumstances. For detailed evaluation please contact HNP Mikrosysteme. Actual performance may vary. Specifications are subject to change without notice.

Technical data

Flow rate	0,048 – 288 ml/min
Smallest dosage volume	30 µl
Displacement volume	48 µl
Max. system pressure	30 bar (435 psi) * (inlet pressure + differential pressure)
Differential pressure range	0 – 15 bar (217 psi)
Liquid temperature range	-15 ... +60 °C
Viscosity range	0.3 – 500 mPas
Velocity range	1 – 6000 rpm
Fluid connection	manifold assembly M4
Wetted parts	stainless steel 316L, 318LN, ceramics, tungsten carbide Ni-based, epoxy resin; static seals: FPM, optional: EPDM, FFPM
Motor	canned BLDC-motor, 24 V DC, 21 W
Controller	integrated 16-bit microcontroller
Interface	0–10 V, RS-232, 1 digital input/output, CANopen *
Electrical connection	8-pole connector, Wago, cable length 1 m
Dimensions (L x W x H)	approx. 84x 52 40 mm
Weight	approx. 580 g

* Customized solution on request.




Contact

HNP Mikrosysteme GmbH
Bleicherufer 25 · D-19053 Schwerin

phone +49 385 52190-301
fax +49 385 52190-333

e-mail info@hnp-mikrosysteme.de
<http://www.hnp-mikrosysteme.de>



Dimensions

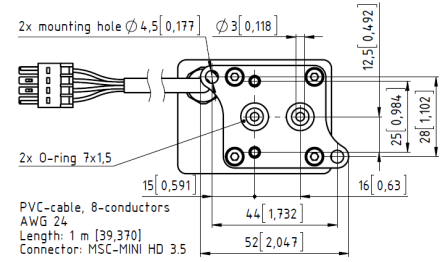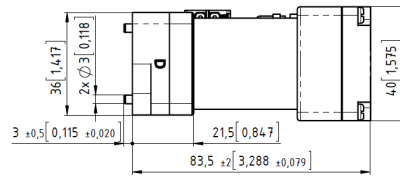

Dimensions are millimeters next to [inches].

Subject to technical changes.

Flow charts

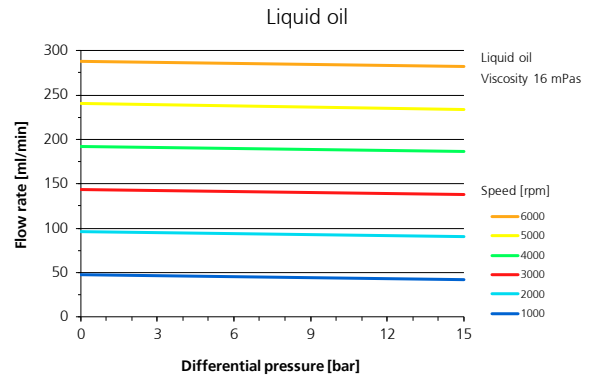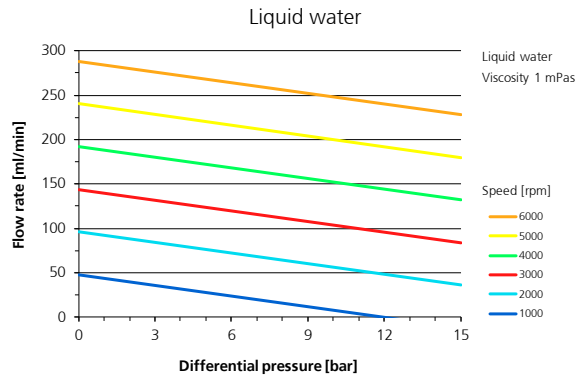

Terminal box S-G05



- compact plastic case
- comes with the micro annular gear pump mzr-7265
- connector for supply voltage 24 V (12 – 28 V DC)
- integrated protective circuit
- potentiometer for speed setting
- Standard interface 0 – 10 V, 0(4) – 20 mA
- Serial interface RS-232
- Two-colored LED status indicator

Item number

14 01 30 02	Magnetic hermetic series pump mzr-7265 with canned BLDC-motor, manifold assembly M4, terminal box S-G05, null-modem cable and software »Motion Manager«
14 06 30 01	Fluid connection manifold assembly M4 for mzr-7265 M4, stainless steel 316L, fluid connection 1/8" NPT

Accessories

Liquid supply accessories tubes, filters etc.

Micro annular gear pumps (and housings) are protected by assigned patents: EP 1115979 B1, US 6,520,757 B1, EP 852674 B1, US 6,179,596 B1, EP 1354135, US 7,698,818 B2. Patents pending DE 10 2011 001 041.6, PCT/IB2011/055108, EP 11 81 3388.3, US 13/884,088, CN 2011 8006 5051.7, HK 13 11 2934.9, DE 10 2011 051 486.4, PCT/EP2012/061514, EP 12 728264.8, US 9,404,492 B2, CN 2012 8003 8326.2. In the US, Europe and China additional patents are pending. mzr®, MoDoS®, µ-Clamp®, HNPMP® are registered German trademarks of HNP Mikrosysteme GmbH. Kalrez® Spectrum™ is a registered trademark of DuPont.

OFFICIAL UK DISTRIBUTOR:
Michael Smith Engineers Limited
www.michael-smith-engineers.co.uk
Freephone: 0800 316 7891