


P200 Series Electronic Precision Metering Pumps

Maximum Flow Rate: 255 L/hr

Maximum Pressure: 69 bar for Metallic Pump Heads
24 bar for Non-metallic Pump Heads

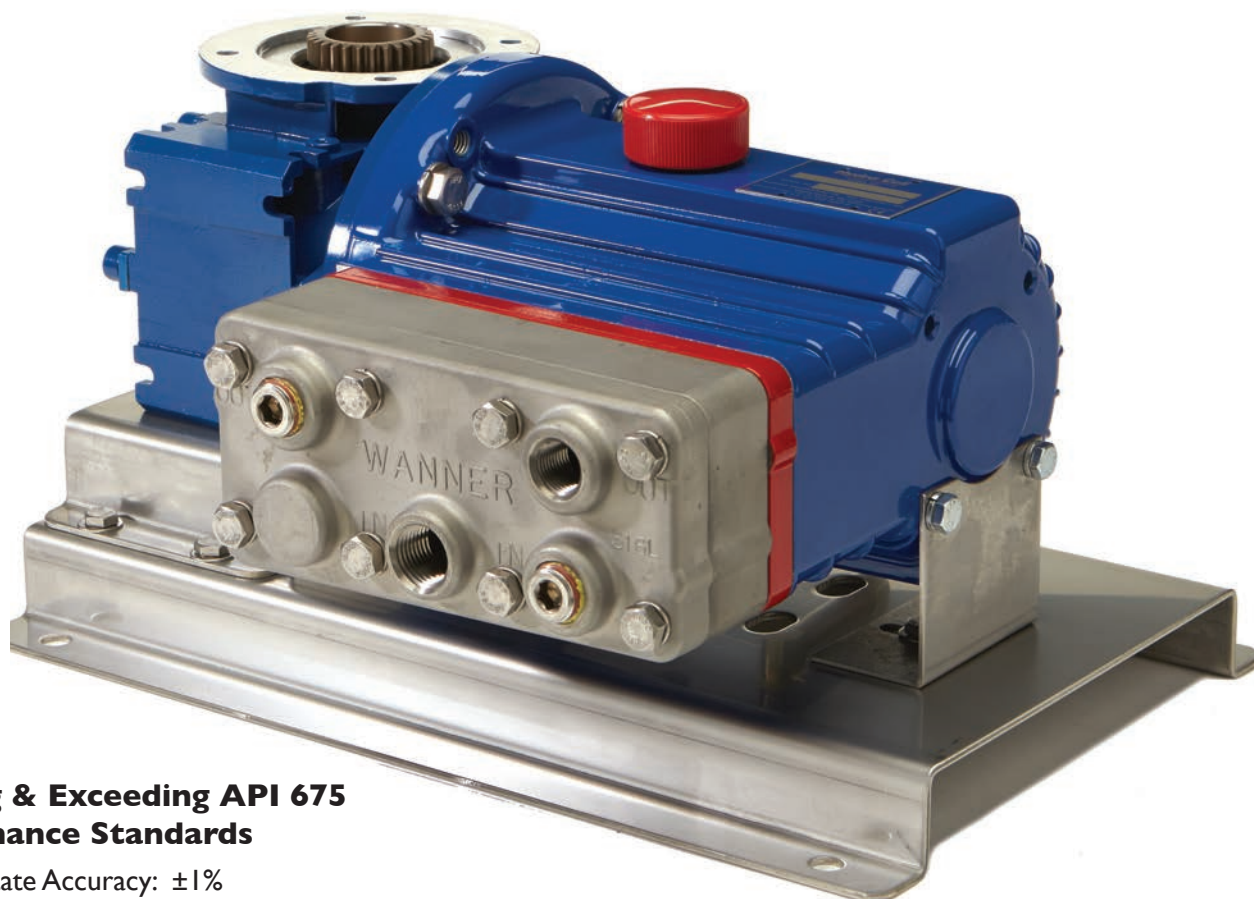


Meeting & Exceeding API 675 Performance Standards

- Steady State Accuracy: $\pm 1\%$
- Linearity: $\pm 3\%$ (over a 10 to 1 turn-down as per API 675)
- Repeatability: $\pm 3\%$
- Infinite turn-down achievable

Unique Multiple Diaphragm Design for Linear, Pulse-free Flow

Hydra-Cell Metering Solutions P200 pumps feature three diaphragms in one pump head. This unique design enables Hydra-Cell to provide virtually “pulse-free” flow without the need to buy expensive pulsation dampeners.

- Minimises pipe strain and other maintenance; enhances operator safety
- Reduces acceleration/friction losses in the suction line
- Provides accurate metering with linear, constant flow

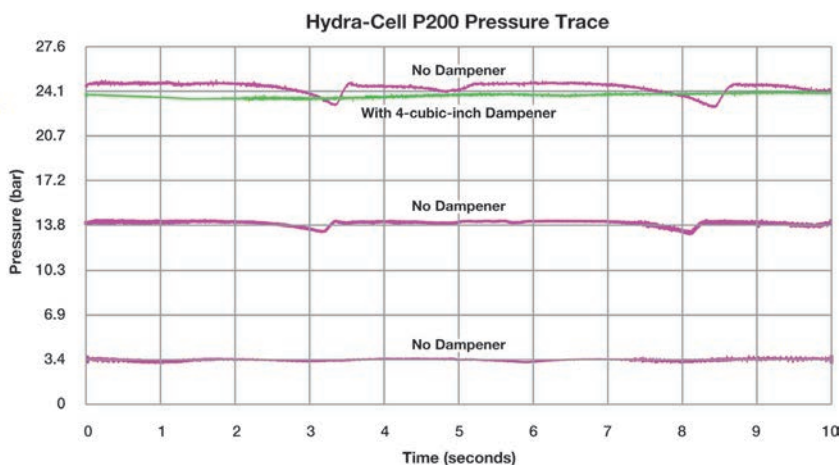

Hydra-Cell can eliminate the need for expensive pulsation dampeners because, as the graph shows, it provides virtually pulse-less flow.

Performance - Flow Capacities and Pressure Ratings

For Synchronous Speed, Self-cooled Motors
L/hr Maximum Flow at Designated Pressure

L/hr All Pumps		L/hr Metallic Pump Heads Only		Pump RPM	Gear Ratio	Motor RPM
7 Bar	17 Bar	34 Bar	69 Bar			
10.6	10.5	10.2	9.9	25	60:1	1500
12.8	12.6	12.3	11.9	30	50:1	
16.0	15.8	15.5	15.0	37.5	40:1	
21.3	21.1	20.7	20.0	50	30:1	
25.6	25.3	24.8	24.1	60	25:1	
32.0	31.6	31.1	30.2	75	20:1	
42.6	42.2	41.5	40.3	100	15:1	
63.9	63.2	62.2	60.5	150	10:1	
85.1	84.3	83.0	80.8	200	7.5:1	
127.7	126.5	124.6	121.3	300	5:1	
170.3	168.7	166.1	161.8	400	7.5:1	3000
255.4	253.0	249.2	242.8	600	5:1	

Required Motor kW

0.18	0.37	0.75
------	------	------

Notes:

1. The motor kW are based on ambient temperature conditions up to 40°C. For ambient temperatures above 40°C, please contact Wanner International.
2. Contact factory for performance specifications.
3. Based on using IE2 motors.
4. Maximum continuous motor speed is 1800 rpm at full pressure.
5. For intermittent or reduced pressure duties, please contact Wanner International.

For 10:1 Turndown, Self-cooled Motors
L/hr Maximum Flow at Designated Pressure

L/hr All Pumps		L/hr Metallic Pump Heads Only		Pump RPM	Gear Ratio	Motor RPM
7 Bar	17 Bar	34 Bar	69 Bar			
10.6	10.5	10.2	9.9	25	60:1	1500
12.8	12.6	12.3	11.9	30	50:1	
16.0	15.8	15.5	15.0	37.5	40:1	
21.3	21.1	20.7	20.0	50	30:1	
25.6	25.3	24.8	24.1	60	25:1	
32.0	31.6	31.1	30.2	75	20:1	
42.6	42.2	41.5	40.3	100	15:1	
63.9	63.3	62.2	60.5	150	10:1	
85.1	84.3	83.0	80.8	200	7.5:1	
127.7	126.5	124.6	121.3	300	5:1	
170.3	168.7	166.1	161.8	400	7.5:1	3000
255.4	253.0	249.2	242.8	600	5:1	

Required Motor kW

0.18	0.25	0.37	0.55	0.75	1.1
1.5					

Notes:

1. The motor kW are based on ambient temperature conditions up to 25°C. For ambient temperatures above 25°C, Force-cooled Motors may be required. Please contact Wanner International.
 2. Contact factory for performance specifications.
 3. Based on using IE2 motors.
 4. Maximum continuous motor speed is 1800 rpm at full pressure.
 5. For intermittent or reduced pressure duties, please contact Wanner International.
- See Page 6 for **Electronic Flow Rate Controller**.

Mechanical Adjustment Controller for ATEX/Explosive Areas

All Min/Max flow rates in litres/hour

7 bar		17 bar		34 bar		69 bar		Pump rpm	Gearbox Ratio	Model Number	Required Motor Size & Frame
Min	Max	Min	Max	Min	Max	Min	Max				
2.0	10.2	1.9	10.0	1.9	9.8	1.6	9.4	5 - 24	25:1	MEC3 - 71B14	0.25kW / IEC 71 / 4-Pole
	12.8		12.6		12.3		11.8	5 - 30	20:1		
	17.1		16.9		16.5		16.0	5 - 40	15:1		
	25.6		25.3		24.8		24.1	5 - 60	10:1		
	34.1		33.7		33.1		32.2	5 - 80	7.5:1	MEC5 - 80B14	0.37kW / IEC 71 / 4-Pole
	51.1		50.6		49.8		48.4	5 - 120	5:1		0.55kW / IEC 71 / 2-Pole
	68.1		67.5		66.4		64.6	5 - 160	7.5:1		0.75kW / IEC 80 / 2-Pole
	102.2		101.2		99.6		97.0	5 - 240	5:1		


P200 Series

Specifications

Diaphragms per Liquid End	3
Flow Control	Electronic variable speed drive
Maximum Discharge Pressure	
Metallic Heads:	69 bar
Non-metallic Heads:	PVDF to 24 bar
	Polypropylene to 17 bar
Maximum Inlet Pressure	17 bar
Maximum Liquid Operating Temperature	
Metallic Heads:	121 °C - Consult factory for correct component selection for temperatures greater 71 °C.
Non-metallic Heads:	PVDF to 80 °C
	Polypropylene to 60 °C
Maximum Solids Size	200 microns
Inlet Port	1/2 inch BSPT
Discharge Port	3/8 inch BSPT
Shaft Rotation	Reverse (bi-directional)
Oil Capacity	0.95 litres
Weight (less motor)	
Metallic Heads:	19.0 kg
Non-metallic Heads:	14.9 kg
Dimensions (less motor)	
Metallic Heads:	396.1 mm W x 296.7 mm D x 227.8 mm H
Non-metallic Heads:	396.1 mm W x 306.3 mm D x 227.8 mm H
Controllers	
Mechanical Adjustment:	220 mm D x 155 mm H for MEC3 (7.2 kg)
Electronic Controller:	215 mm W x 280 mm D x 300 mm H (10 kg)

Representative Drawings (mm)

Metallic Pump Heads

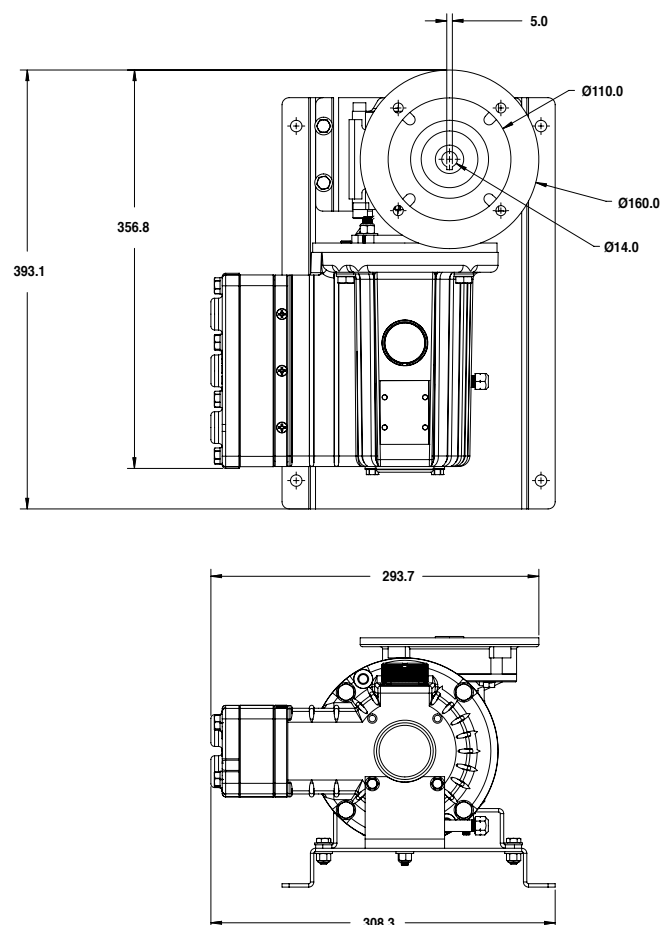

P200 with Polypropylene pump head



P200 with Brass pump head

P200 Series

Pump Ordering Information

A complete pump order number contains 13 digits based on the specified pump materials listed below. Contact your Hydra-Cell sales representative for accompanying motor drive options.

1 P	2 2	3 0	4 0	5	6	7	8	9	10	11	12	13
---------------	---------------	---------------	---------------	---	---	---	---	---	----	----	----	----

Pump Model Size (Digits 1-4)

P200 For all P200 Pumps (Non Kel-Cell)

Pump Version (Digit 5)

N	NPT Ports (NEMA motors only)
M	BSPT Ports (IEC motors only)
A	ATEX BSPT Ports
	ATEX reducer must be ordered in conjunction with one of the kits below:
-	ATEX 2014/34/EU Certified, Category 2, Zone 1
-	ATEX 2014/34/EU Certified, Category 3, Zone 2
	<i>Note - All options include: Certificate, Oil Level Monitor, Earth Stud & Secondary ATEX Label</i>

Pump Head / Retainer Material (Digit 6)

B	Brass / Hastelloy C
M	PVDF / PVDF
P	Polypropylene / Polypropylene
R	316L Stainless Steel with ANSI RF Flanges, Class 300lb x 600lb / Hastelloy C
-	316L Stainless Steel with DIN Flanges, Class PN40 DN20 x PN100
DN15♦	
S	316L Stainless Steel / Hastelloy C
-	316L Stainless Steel with Tri-clamp (1" Inlet & 3/4" discharge) Flanges polished to 0.8 Ra♦
-	316L Stainless Steel with Tri-clamp (1" Inlet & 3/4" discharge) Flanges polished to 0.4 Ra♦
	<i>Tri-clamp options include polishing of Pump Head, Valve Plate, Valves, Valve Seats, Springs & Retainers to 0.8 Ra or 0.4 Ra per above, Sanitary Drain along with TSE, Passivation, Surface Finish & Weld Procedure Certificates</i>
T	Hastelloy C / Hastelloy C
	♦ Selecting this option will result in a Wanner International generated Pump Code, stamped onto the pump.

Diaphragm & O-ring Material / Oil (Digit 7)

A	Aflas / PTFE o-ring (Synthetic oil)
M	Aflas / PTFE o-ring & FKM drive case elastomers (Mesamoll oil)
E	EPDM (EPDM-compatible oil)
G	FKM (Standard oil)
S	FKM (Food-contact oil)
X	FKM (Synthetic oil)
J	PTFE (Food-contact oil)
W	PTFE (Synthetic oil)
	<i>Note: PTFE diaphragms require flooded suction.</i>
P	Neoprene (Standard oil)
R	Neoprene (Food-contact oil)
Z	Neoprene (Synthetic oil)
T	Buna-N (Standard oil)
F	Buna-N (Food-contact oil)
Y	Buna-N (Synthetic oil)

Check Valve Material (Digits 8-9) (Valve Spring / Valve Seat / Valve)

SS	Elgiloy / 316L SST / Nitronic 50
TT	Hastelloy C / Hastelloy C / Hastelloy C
SC	Elgiloy / Ceramic / Ceramic
TC	Hastelloy C / Ceramic / Ceramic

Gearbox Ratio (Digits 10-12) IEC Motors

060	60:1	(63 B5 Motor Frame)
050	50:1	(63 B5 Motor Frame)
040	40:1	(63 B5 Motor Frame)
030	30:1	(63 B5 Motor Frame)
025	25:1	(63 B5 Motor Frame)
020	20:1	(63 B5 Motor Frame)
015	15:1	(63 B5 Motor Frame)
A15	15:1	(71 B5 Motor Frame)
010	10:1	(63 B5 Motor Frame)
A10	10:1	(71 B5 Motor Frame)
B10	10:1	(80 B5 Motor Frame)
007	7.5:1	(63 B5 Motor Frame)
A07	7.5:1	(71 B5 Motor Frame)
B07	7.5:1	(80 B5 Motor Frame)
005	5:1	(63 B5 Motor Frame)
A05	5:1	(71 B5 Motor Frame)
B05	5:1	(80 B5 Motor Frame)

Note: These are Wanner standard options. Other flange sizes are available upon request.

Base Plate (Digit 13)

C	Carbon Steel (Epoxy painted)
S	304 Stainless Steel

Notes:

1. Please consult factory for rpm below 6.
2. Constant torque drives are required to meet API 675 performance standards.
3. Ensure that the motor chosen is capable of delivering the torque and power required over the full range of adjustment. (Contact Wanner International for values.)
4. IEC motor size has been calculated assuming IE2 performance as defined by IEC 60034-30.

Calibration Cylinders

Port Size	Cylinder Size (mL)	Cylinder Capacity (L/h)	Maximum Shaft (rpm)	Part Number BSPT Ports	Dimensions - mm	
					Height	Diameter
PVC Cylinders						
1/2"	200	24	75	111-001-B	482.6	38.1
3/4"	1000	120	300	111-003-B	558.8	63.5
1"	2000	240	600	111-004-B	508.0	94.0
2"	10000	1200	--	111-006-B	635.0	176.5.0
Glass Cylinders						
1/4"	30	3.6	36	111-010-B	355.6	35.6
1/2"	200	24	75	111-011-B	533.4	63.5
3/4"	1000	120	300	111-013-B	685.8	88.9
1"	2000	240	600	111-014-B	685.8	127.0



Back Pressure & Pressure Relief Valves

Port Size	Maximum Flow (L/h) Pulsating	Wetted* Materials	Pressure Adjustment Range (bar)	Maximum Temp. (°C)	Part Number	
					Back Pressure Valves (BSPT Ports)	Pressure Relief Valves (BSPT Ports)
3/8" (DN 10)	757	Polypropylene	0.7 - 10.3	90	111-101-B	111-401-B
	757	PVDF	0.7 - 10.3	90	111-103-B	111-403-B
	757	316 SST	0.7 - 10.3	149	111-106-B	111-406-B
	757	Hastelloy C	0.7 - 10.3	149	111-110-B	111-410-B
3/8" (DN 10)	757	316 SST	3.5 - 24	149	111-107-B	111-407-B
	757	Hastelloy C	3.5 - 24	149	111-111-B	111-411-B
3/8" High Pressure (DN 10)	2650	316 SST	24 - 172	149		111-706-B
	2650	Hastelloy C	24 - 172	149		111-710-B

* Diaphragm material is PTFE on all models. Other materials available on request.

Hastelloy® C is a registered trademark of Haynes International, Inc.



Metering and Dosing Control Options

Electronic Flow Rate Adjustment for Local Control

- Force-cooled Drives supplied as standard
- ATEX Dust Zone 2I (Ex tb III CT I25c Db)
- IP66 Standard
- Various flow rate adjustments options including:
 1. On-board potentiometer(s)
 2. On-board key-pad controller with flow rate display
 3. Removable, hand-held key-pad controller for authorised personnel only
 4. Use the 10:1 Turndown table on Page 2 to select the correct motor kW for ambient temperatures up to 25°C

Maximum Flow at Designated Pressure (see table on Page 2)



On-board keypad control

Hand-held keypad control

Mechanical Flow Rate Adjustment for Local Control

- ATEX Zone I
- Linear fine adjustment scale on hand-wheel
- High reliability due to frictionless design
- Option to fit a mechanical lock to prevent unauthorised flow rate change



Control Freak™ for Sophisticated Local Control

- Option available to control up to 6 x Hydra-Cell pumps with one Hydra-Cell “Control Freak”
- Multiple Variable Frequency Drive (VFD) options
- Enables programming for flow rate or totalisation
- Allows up to 10 x separate batch sequences
- Built-in Calibration mode



P200 Series



Standards Compliance



- API 675 performance testing, both witnessed and non-witnessed available. (Consult your local Wanner office for further details.)



Wanner International Ltd.™

**WANNER INTERNATIONAL
UNITED KINGDOM**

8 & 9 Fleet Business Park
Sandy Lane • Church Crookham
Hampshire UK GU52 8BF
t +44(0) 1252 816847
e: sales@wannerint.com



Wanner Engineering, Inc.™

**WANNER ENGINEERING
WORLD HEADQUARTERS &
MANUFACTURING
Minneapolis USA**

t +1 612-332-5681
e: sales@wannereng.com

**REGIONAL OFFICE
Texas USA**

t +1 940-322-7111
e: sales@wannereng.com

**LATIN AMERICAN OFFICE
São Paulo, Brazil**

t +55 (11) 99582-1969
e: sales@wannereng.com



Wanner Pumps Ltd.™

**WANNER PUMPS
Kowloon HONG KONG**

t +852 3428 6634
e: sales@wannerpumps.com

Shanghai CHINA

t +86 21 6876 3700
e: sales@wannerpumps.com

OFFICIAL UK DISTRIBUTOR:
Michael Smith Engineers Limited
www.michael-smith-engineers.co.uk
Freephone: 0800 316 7891

www.hydra-cell.co.uk