

T100 Series Medium Pressure Models T100K & T100M

Maximum Flow Rate: 170 l/min (45 gpm) 1543 BPD
Maximum Pressure: 241 bar (3500 psi)



API 674



WANNER
Hydra-Cell[®]
Seal-less Pump Technology



*T100 Series medium pressure model
with Stainless Steel pump head.*

Available
to Meet
API 674

- Seal-less design eliminates leaks, hazards and the expense associated with seals and packing.
- Low NPSH requirements allow for operation with a vacuum condition on the suction. Positive suction pressure is not necessary, and there is no need for a booster or charge pump.
- Patented Diaphragm Positioning Control (DPC) protects the diaphragms against a closed or blocked suction line.
- Can run dry indefinitely without damage, eliminating downtime and repair costs.
(Note: Intentional dry running not permitted in ATEX zones.)
- Unique diaphragm design handles more abrasives with less wear than gear, screw or plunger pumps.
- Hydraulically balanced diaphragms to handle high pressures with low stress.
- Significantly lower energy costs than centrifugal pumps.
- Rugged construction for long life with minimal maintenance.
- Compact design and double-ended shaft provide a variety of installation options.
- Hydra-Cell T100 Series pumps can be configured to meet API 674 Standards - consult factory for details.



T100 Series Medium Pressure Performance

Capacities

Model	Max. Input rpm	Plunger Dia.		Max. Flow Capacities			Max. Pressure Ratings			
							Discharge		Inlet	
		Inches	mm	gpm	l/min	BPD	psi	bar	psi	bar
T100K	450	1.750	44	45	170	1543	3000	207	500	34
T100M	450	1.625	41	38	144	1302	3500	241	500	34

Consult factory when operating below 45 rpm.

Maximum Flow at Designated Pressure

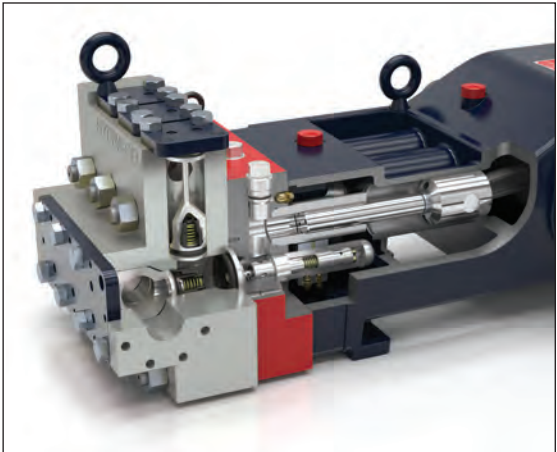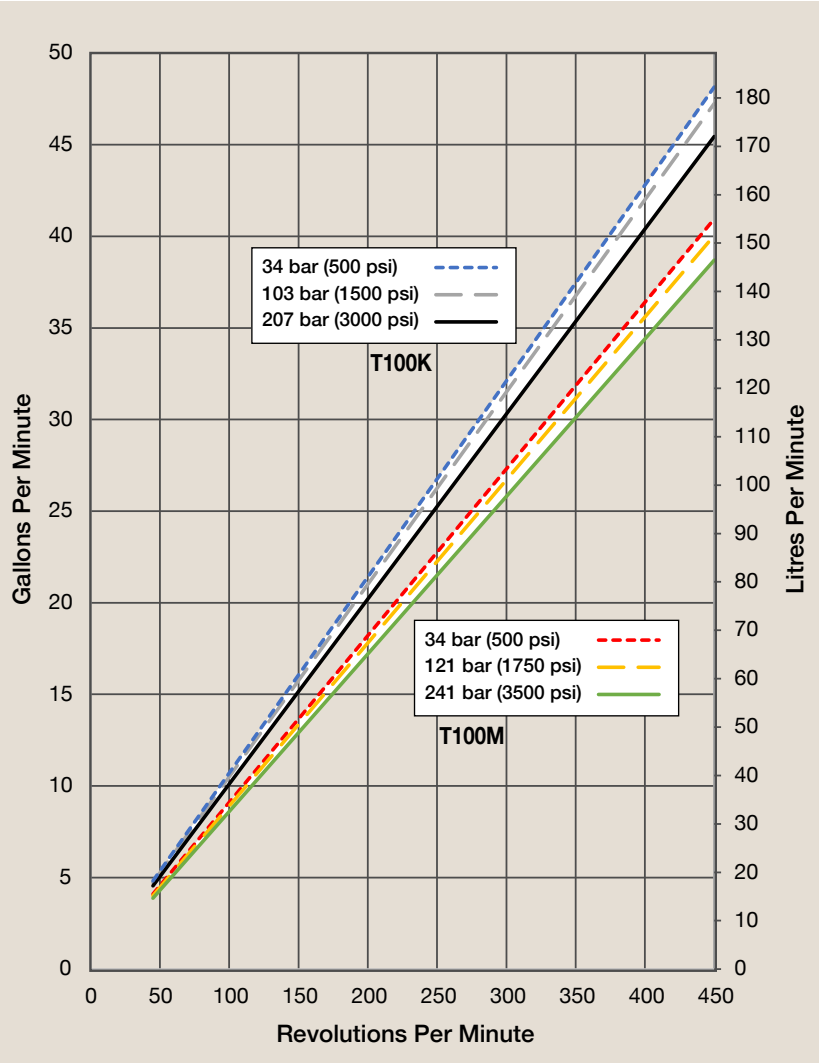

T100 Series pumps feature the Hydra-Cell seal-less design, eliminating clean-up costs from leaking seals or packing and protecting operators from dangerous fluids such as those containing hydrogen sulfide.

Due to the Wanner Engineering Continuous Improvement Program, specifications and other data are subject to change.


T100 Series Model T100K API 674 Performance

Capacities

Flow						Pressure	
Model	Max. Input rpm	Duty	Max. Flow @ 103 bar (1500 psi)			Maximum Inlet Pressure	
			gpm	l/min	BPD	34 bar (500 psi)	
T100K	450	Intermittent	45	170	1553	Maximum Discharge Pressure 207 bar (3000 psi)	
	375	Continuous	38	144	1296		

Consult factory when operating below 45 rpm.

Maximum RPM at Designated Pressure

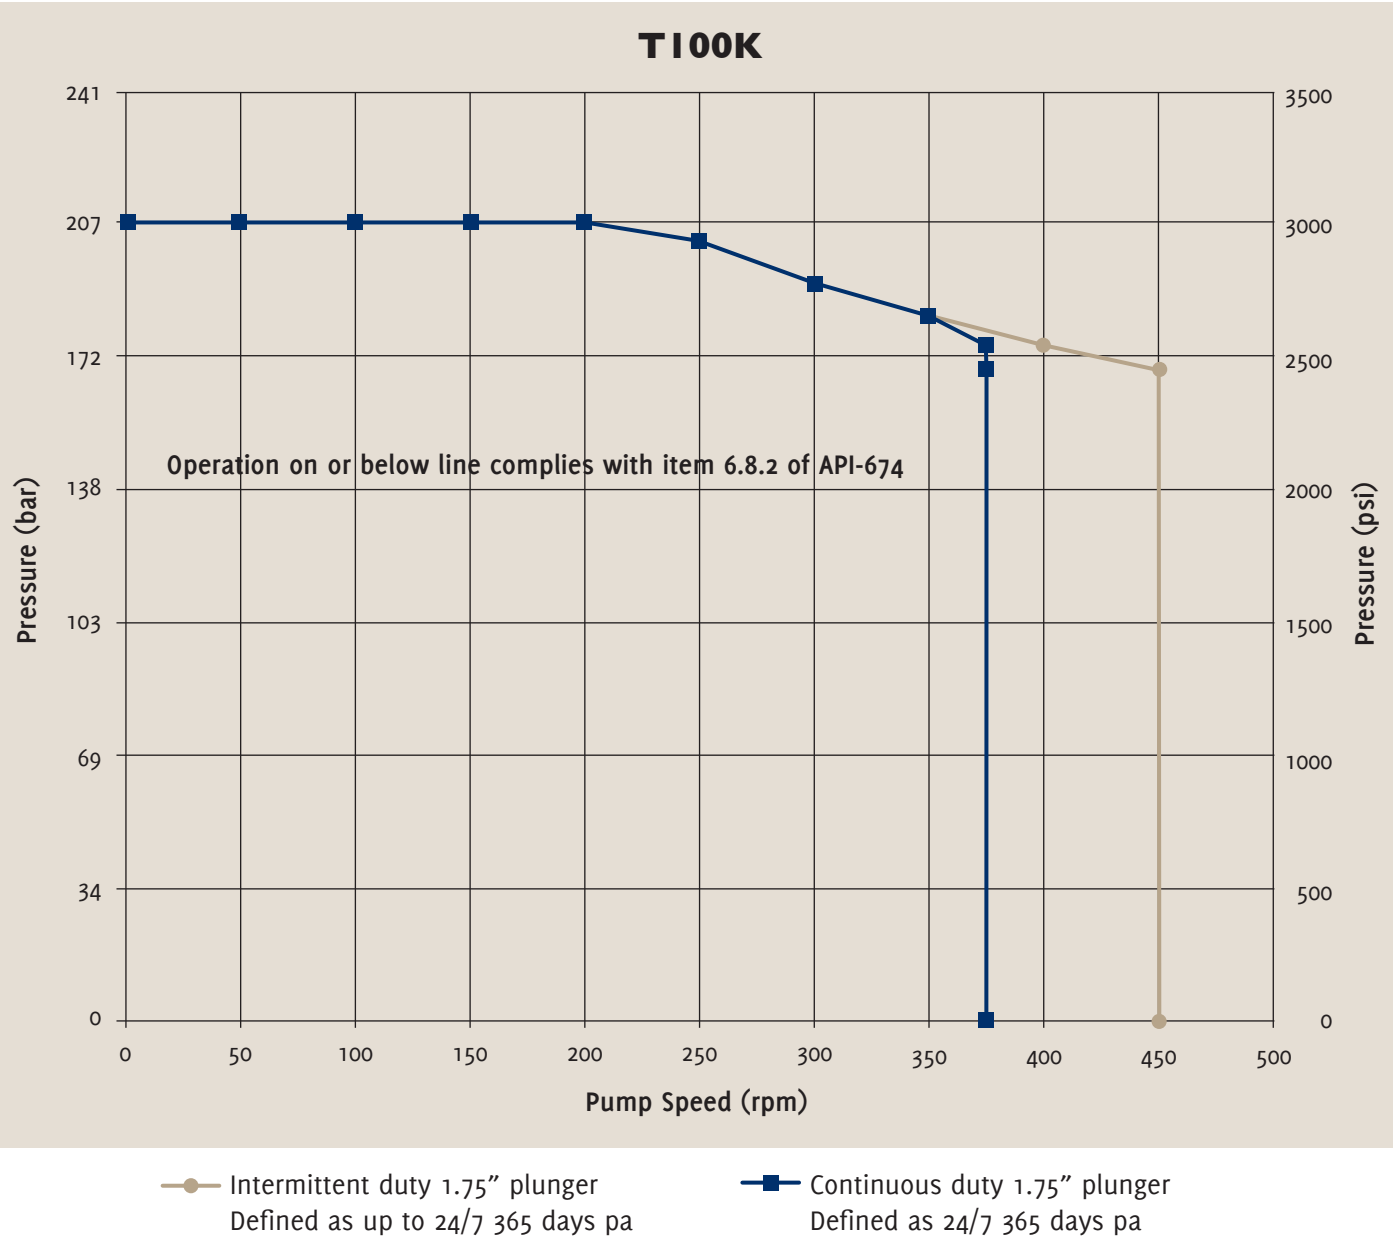


T100 Series Model T100M API 674 Performance

Capacities

Flow						Pressure	
Model	Max. Input rpm	Duty	Max. Flow @ 103 bar (1500 psi)			Maximum Inlet Pressure	
			gpm	l/min	BPD	34 bar (500 psi)	
T100M	450	Intermittent	39	144	1337	Maximum Discharge Pressure 241 bar (3500 psi)	
	375	Continuous	32	120	1097		

Consult factory when operating below 45 rpm.

Maximum RPM at Designated Pressure

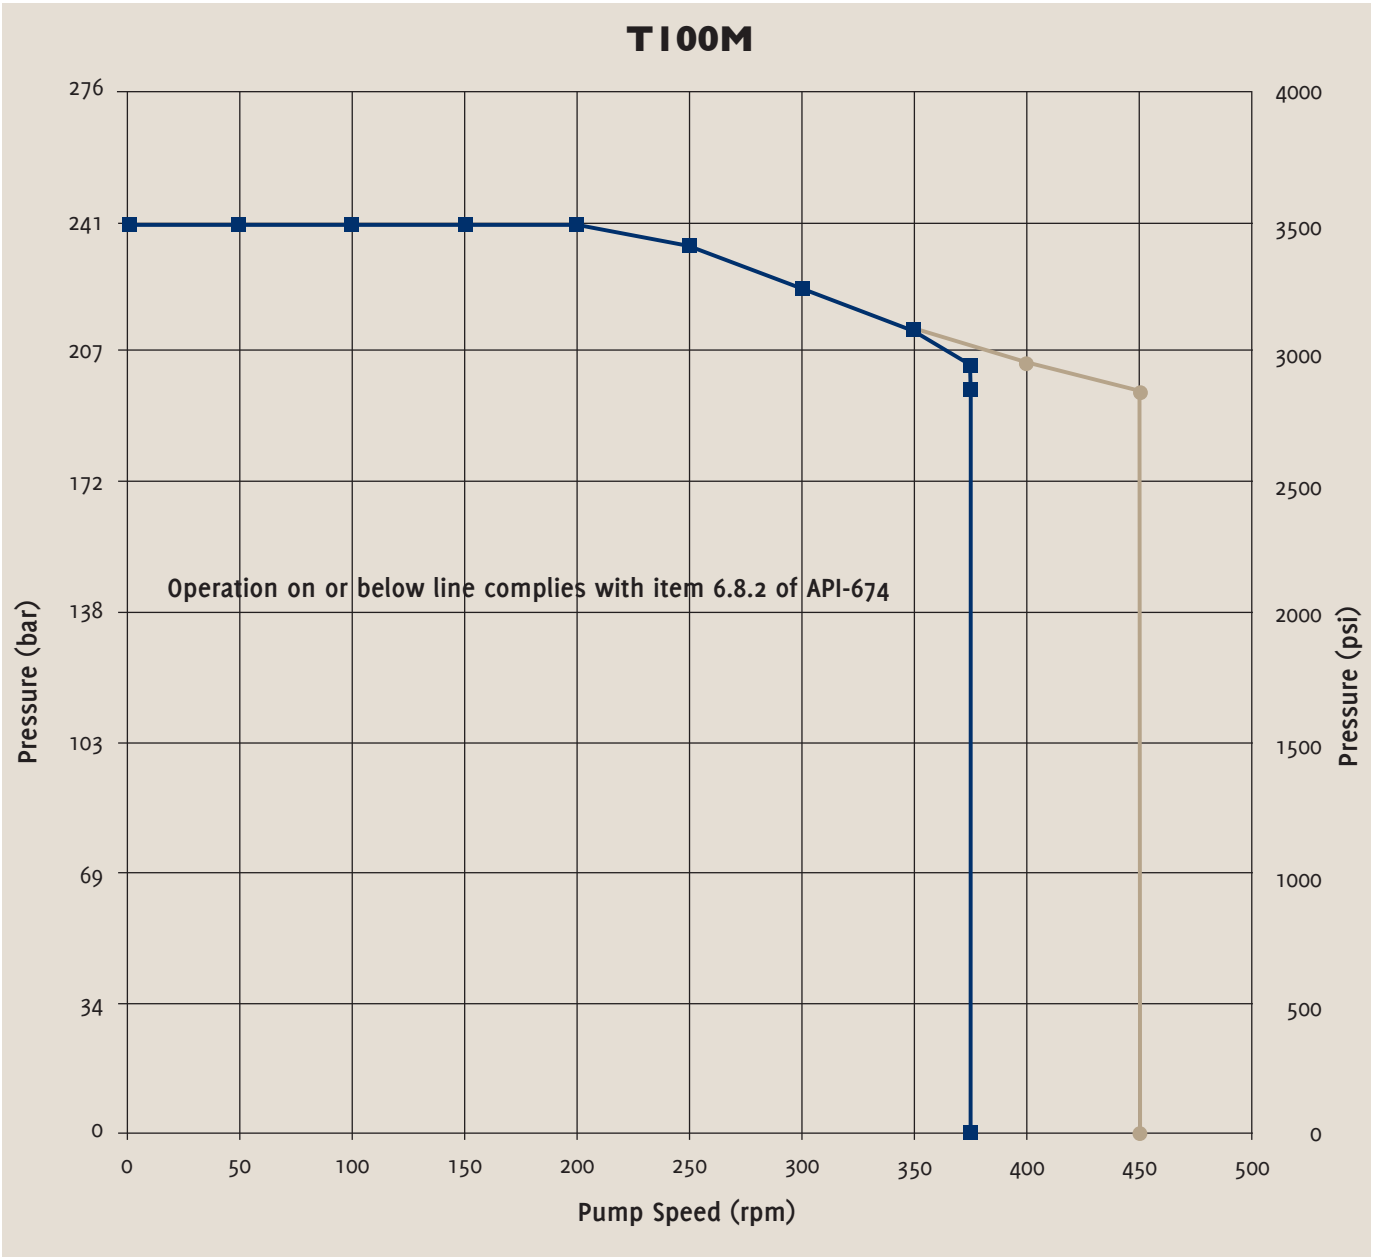


● Intermittent duty 1.625" plunger
Defined as up to 24/7 365 days pa


■ Continuous duty 1.625" plunger
Defined as 24/7 365 days pa

T100 Series Medium Pressure Specifications

Flow Capacities					
Model	Pressure bar (psi)	rpm	gpm	l/min	BPD
T100K	207 (3000)	450	45	170	1543
T100M	241 (3500)	450	38	144	1302
Delivery					
	Pressure bar (psi)		gal/rev	litres/rev	
T100K	34 (500)		0.107	0.406	
	103 (1500)		0.105	0.397	
	207 (3000)		0.101	0.384	
T100M	34 (500)		0.091	0.345	
	121 (1750)		0.089	0.338	
	241 (3500)		0.086	0.327	
rpm					
Maximum:		450			
Minimum:		45 (Consult factory for speeds less than 45 rpm.)			
Maximum Discharge Pressure					
Metallic Heads:		T100K	207 bar (3000 psi)		
		T100M	241 bar (3500 psi)		
Maximum Inlet Pressure 34 bar (500 psi)					
Operating Temperature Limits					
Maximum Liquid Temperature:		82.2 °C (180 °F)			
Diaphragm Material Minimum Service Temperature (Ambient & Liquid):					
Aflas		30 °C			
EPDM		-20 °C			
FKM		5 °C			
Buna-N (HBNR)		-5 °C			
Consult factory for temperatures outside of these ranges					
Maximum Solids Size		800 microns			
Input Shaft		Left or Right Side			
Inlet Ports		3-1/2 inch Class 300 RF ANSI Flange or 2-1/2 inch NPT			
Discharge Ports		1-1/2 inch Class 2500 RTJ ANSI Flange or 1-1/2 inch NPT			
Plunger Stroke Length		88.9 mm (3-1/2 inch)			
Shaft Diameter		76.2 mm (3 inch)			
Shaft Rotation		Uni-directional (See rotation arrow.)			
Oil Capacity		19.4 litres (20.5 US quarts)			
		See page 7 for oil selection and specification.			
Weight					
Metallic Heads:		499 kg (1100 lbs.)			
Fluid End Materials					
Diaphragm Follower Screw:		316 Stainless Steel			
Outlet Valve Retainer:		316 Stainless Steel			
Plug-Outlet Valve Port:		316 Stainless Steel			
Inlet Valve Retainer:		316 Stainless Steel			
See page 7 for customer-specified fluid end materials choices.					
Power End Materials					
Crankshaft:		Forged Q&T Alloy Steel			
Connecting Rods:		Ductile Iron			
Crossheads:		12L14 Steel			
Crankcase:		Ductile Iron			
Bearings:		Spherical Roller/Journal (main)			
		Steel Backed Babbitt (crankpin)			
		Bronze (wristpin)			

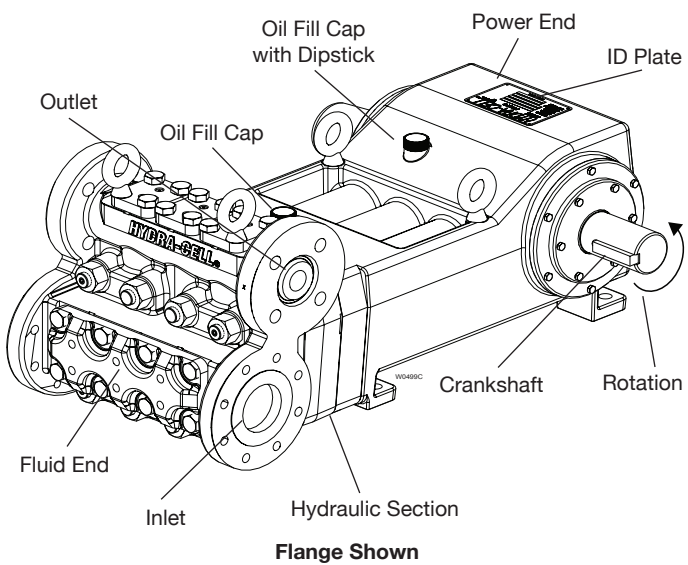

Net Positive Suction Head (NPSHr)

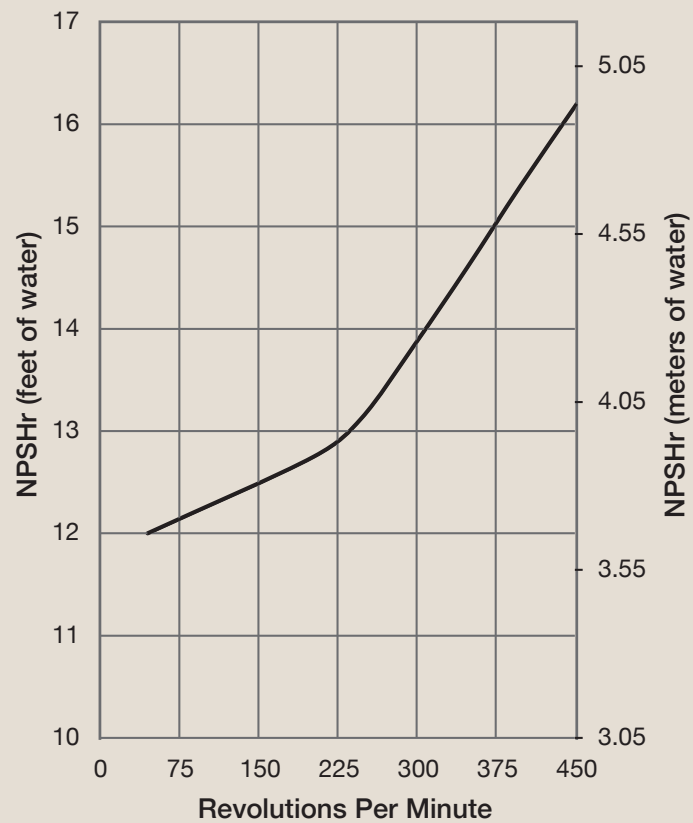

Calculating Required Horsepower (kW)*

$$\frac{\text{gpm} \times \text{psi}}{1,460} = \text{electric motor hp}^*$$

$$\frac{\text{lpm} \times \text{bar}}{511} = \text{electric motor kW}^*$$


* hp (kW) is required application power.

Attention!


When sizing motors with variable speed drives (VFD): It is very important to select a motor and a VFD rated for constant torque inverter duty service and that the motor is rated to meet the torque requirements of the pump throughout desired speed range.

T100 Series Medium Pressure Dimensions

Threaded Version Inches (mm)

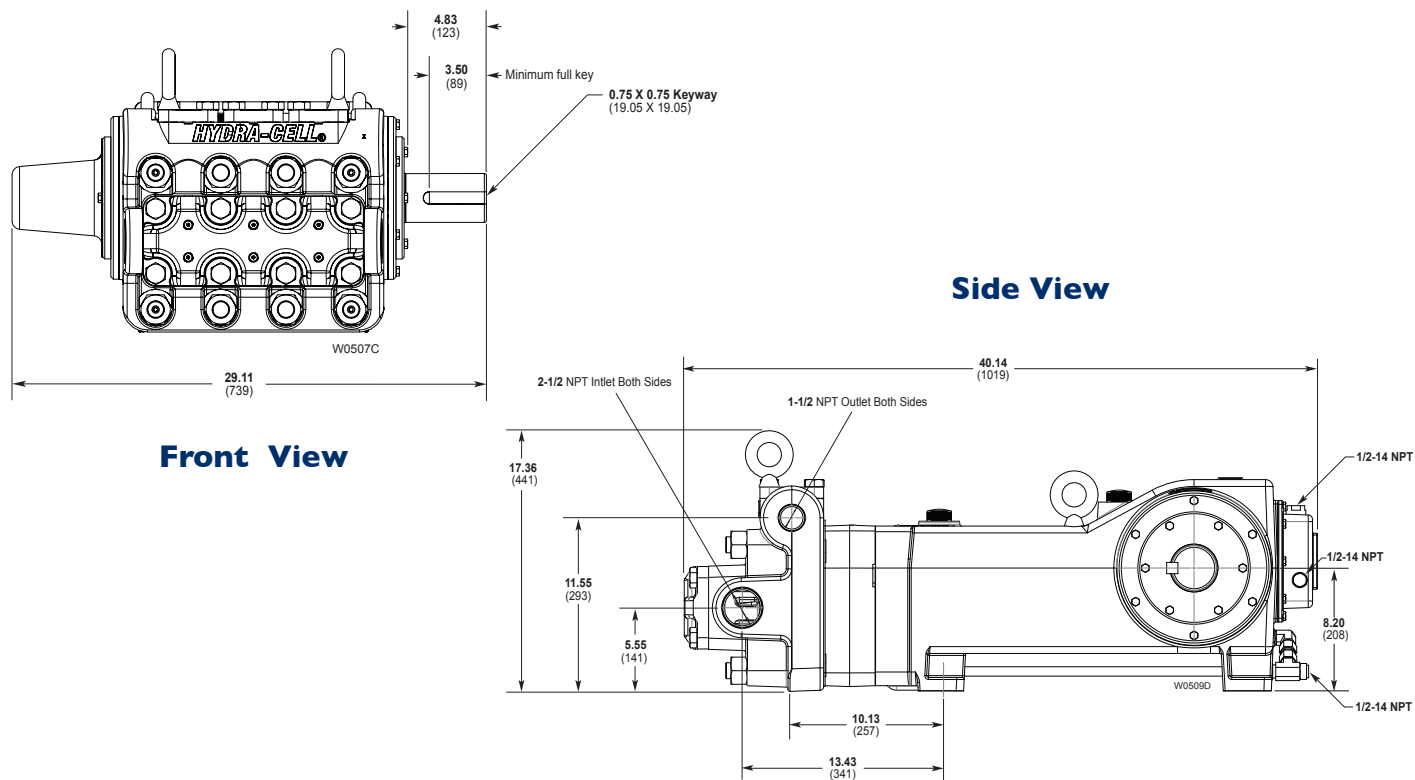

Flanged Version Inches (mm)

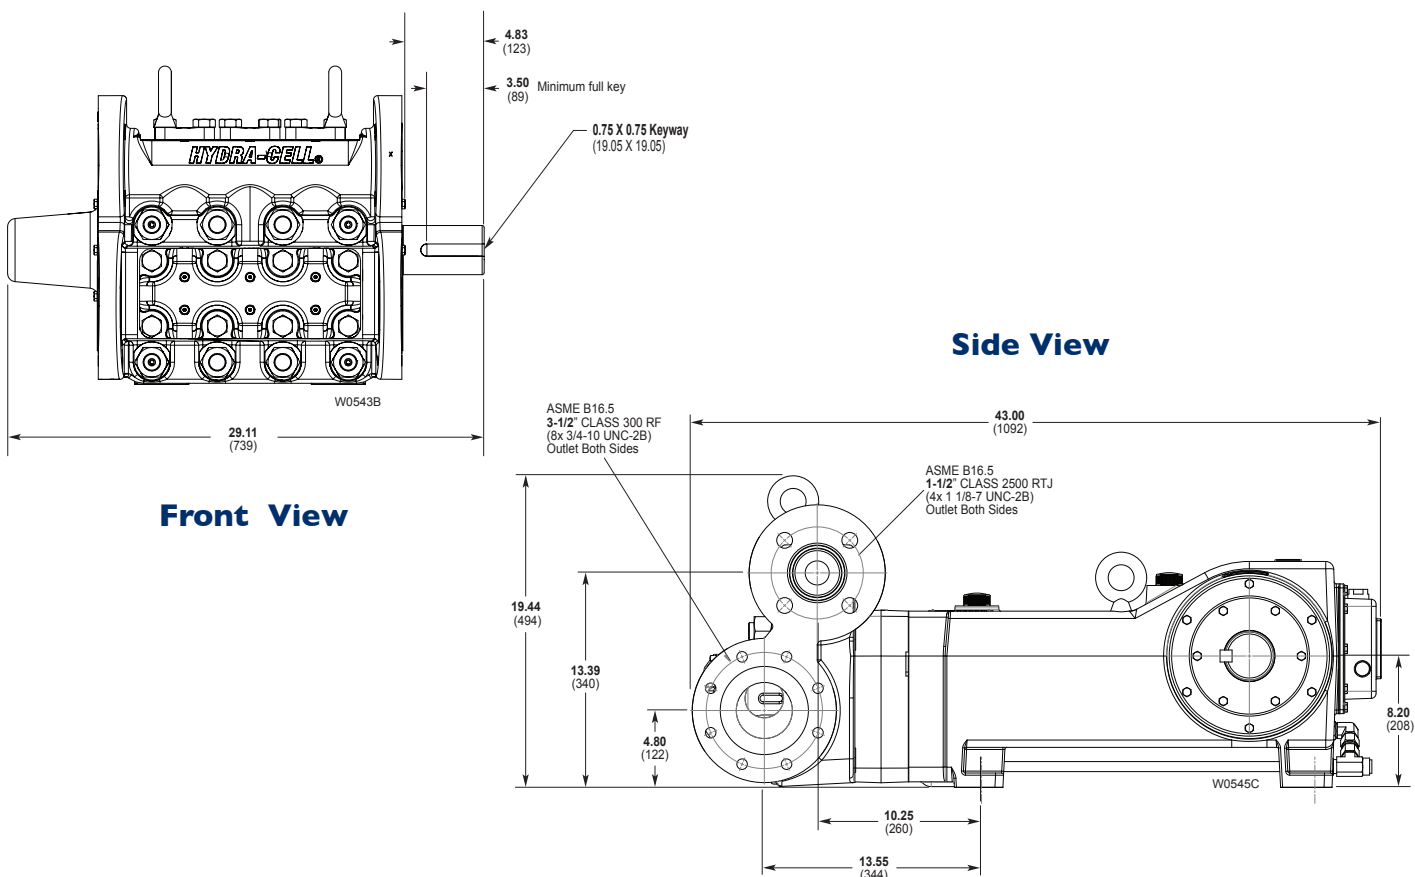

Note: Dimensions are for reference only. Contact Wanner International for certified drawings.

T100 Series Medium Pressure **How to Order**

Ordering Information

1

T

2

1

3

0

4

0

5

6

7

8

9

10

11

12

13

14


A complete T100 Series Medium Pressure Model Number contains 14 digits including 10 customer-specified design and materials options, for example: T100KADGDDEPAO.

Medium Pressure

Digit	Order Code	Description
1-4	T100	Pump Configuration Shaft-driven API 674 - Contact Wanner International
5	K M	Performance Max. 170 l/min (45 gpm) 1543 BPD @ 207 bar (3000 psi) Max. 144 l/min (38 gpm) 1302 BPD @ 241 bar (3500 psi)
6	A R	Pump Head Version NPT Ports (for NAB only) ANSI Flange Ports (RF on Inlet / RTJ on Discharge)
7	D G S T	Pump Head Material Nickel Aluminium Bronze (NAB) Duplex Alloy 2205 Stainless Steel 316L Stainless Steel C3FM Hastelloy CX2M
8	A E G T	Diaphragm & O-ring Material Aflas EPDM (requires EPDM-compatible oil - digit 13 code D) FKM Buna-N (HBNR)
9	D H N T	Valve Seat Material Tungsten Carbide* 17-4 Stainless Steel Nitronic 50 Hastelloy C
10	D F N T	Valve Material Tungsten Carbide* 17-4 Stainless Steel Nitronic 50 Hastelloy C
11	E T	Valve Springs Elgiloy Hastelloy C
12	M P S T	Valve Spring Retainers PVDF Polypropylene 316 SST Hastelloy C


Digit	Order Code	Description
13	A B D E H	Hydra-Oil 10W30 standard-duty oil 40-wt. oil EPDM-compatible oil Food-contact oil 15W50 high-temp severe-duty synthetic oil
14	C O X	Oil Level Monitor Cover Float switch, normally closed (recommended) Float switch, normally open ATEX Certified Pump 2014/34/EU Zone 1 II 2/3 G Ex h IIC T5...T4 Gb/Gc With ATEX float switch

Note: The Oil Level Monitor Cover is an assembly that replaces the previous back cover on T100 Series pumps. It contains a float switch assembly that can trigger an alarm or shutdown when pre-defined levels of high or low oil are reached. It may also be ordered without a float switch cover.

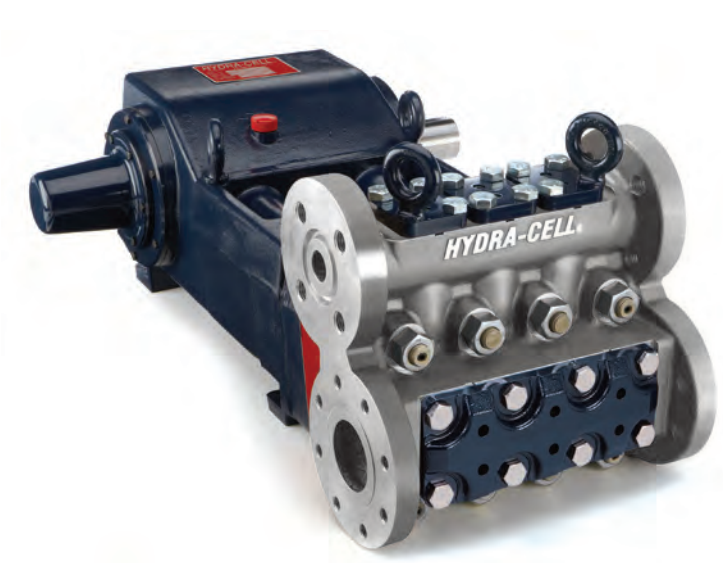

*Tungsten Carbide valve seat and disc are a matched set and must be purchased together.

T100 Series Medium Pressure

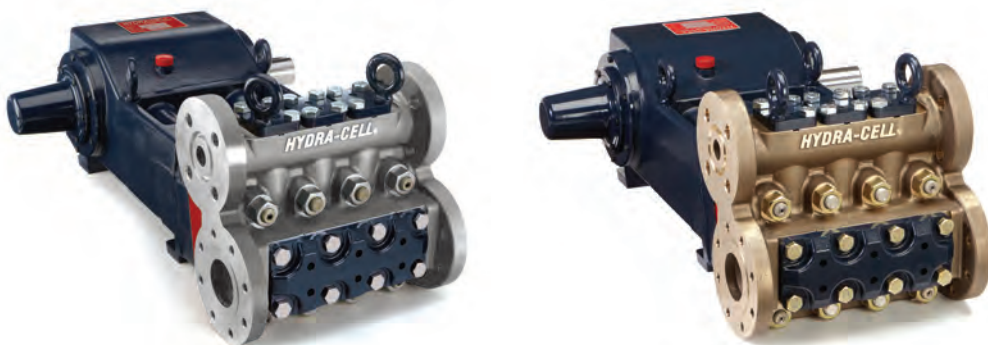

WANNER

Hydra-Cell®

Partners in over 70 Countries

Standards Compliance



Wanner International Ltd.

**WANNER INTERNATIONAL
UNITED KINGDOM**

8 & 9 Fleet Business Park
Sandy Lane • Church Crookham
Hampshire UK GU52 8BF
t +44(0) 252 816847
e: sales@wannerint.com

Wanner Engineering, Inc.

**WANNER ENGINEERING
WORLD HEADQUARTERS &
MANUFACTURING
Minneapolis USA**

t +1 612-332-5681
e: sales@wannereng.com

**REGIONAL OFFICE
Texas USA**

t +1 940-322-7111
e: sales@wannereng.com

LATIN AMERICAN OFFICE

São Paulo, Brazil
t + 55 (11) 99582-1969
e: sales@wannereng.com

Wanner Pumps Ltd.

**WANNER PUMPS
Kowloon HONG KONG**
t +852 3428 6634
e: sales@wannerpumps.com

Shanghai CHINA
t +86-21-6876 3700
e: sales@wannerpumps.com

www.hydra-cell.co.uk