




## 127C SERIES™, 1127C SERIES™, 4127C SERIES™

STAINLESS STEEL CONSTRUCTION | UNIVERSAL PRODUCT LINE

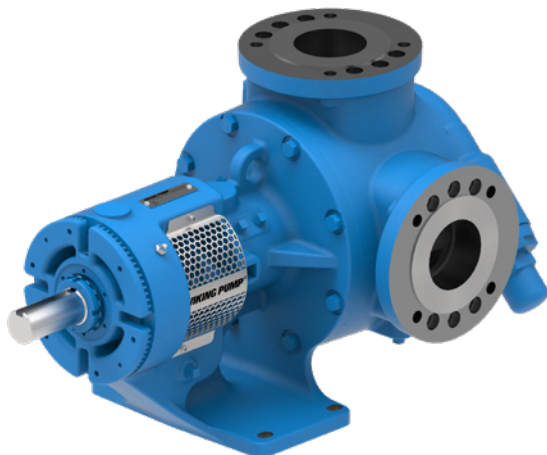


### FEATURES & BENEFITS

- All stainless steel construction for corrosion resistance over a wider pH range
- ProPort™ casing utilizes mounting pads on each port designed to fit a variety of different flange types and sizes, enabling flexibility when connecting pumps to piping
- U-Plus™ bracket, available on H-QS sizes, offers seal location to be in the stuffing box or behind the rotor



**HL127C**  
Shown with  
Opposite Ports

Stainless steel window guards offer protection against moving parts

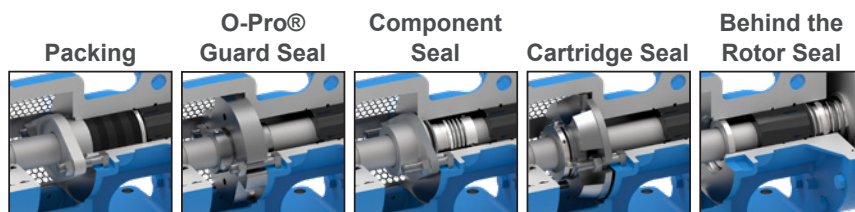

U-Plus™ bracket seal chamber accepts a variety of seal types

Internal circulation promotes flow behind the rotor

Double row ball bearing or tapered roller bearings for axial thrust control

Relief valve

**KK127C**  
Shown with Packing

Large diameter threaded bearing housing allows easy seal removal

Casing Drain

ProPort™ casing offers an adaptable port design with a variety of port sizes and types

Rotor  
Idler

One-piece cast bracket with seal between bearings provides rigid foundation to maximize seal and bearing life



**CAPACITY**  
to 320 GPM  
(73 m³/h)



**PRESSURE**  
to 150 PSI  
(10 BAR)



**VISCOSITY**  
28 to 2,000,000 SSU  
(0.1 to 440,000 cSt)



**TEMPERATURE**  
-120°F to +500°F  
(-85°C to +260°C)


## PERFORMANCE

MODELS			SPECIFICATIONS				
Non-Jacketed			Performance			Standard Ports *	
Packing	O-Pro® Seal	Mechanical Seal	Max Speed, RPM	GPM	m³/h	Size, Inches	Type **
H127C		H4127C	1150	10	1.9	1.5	NPT
	H1127C		760	6	1.4	1.5	NPT
HL127C		HL4127C	1150	20	3.7	1.5	NPT
	HL1127C		760	13	3	1.5	NPT
K127C	K1127C	K4127C	520	50	11	2	Flange
KK127C	KK1127C	KK4127C	520	65	15	2	Flange
L127C	L1127C	L4127C	520	100	23	2.5	Flange
LL127C	LL1127C	LL4127C	520	135	31	3	Flange
LS127C	LS1127C	LS4127C	520	160	36	3	Flange
Q127C	Q1127C	Q4127C	350	200	45	4	Flange
QS127C	QS1127C	QS4127C	350	320	73	6	Flange

\* All sizes available with opposite porting

\*\* To see all port options, refer to Catalog Section 2701

## CURVES

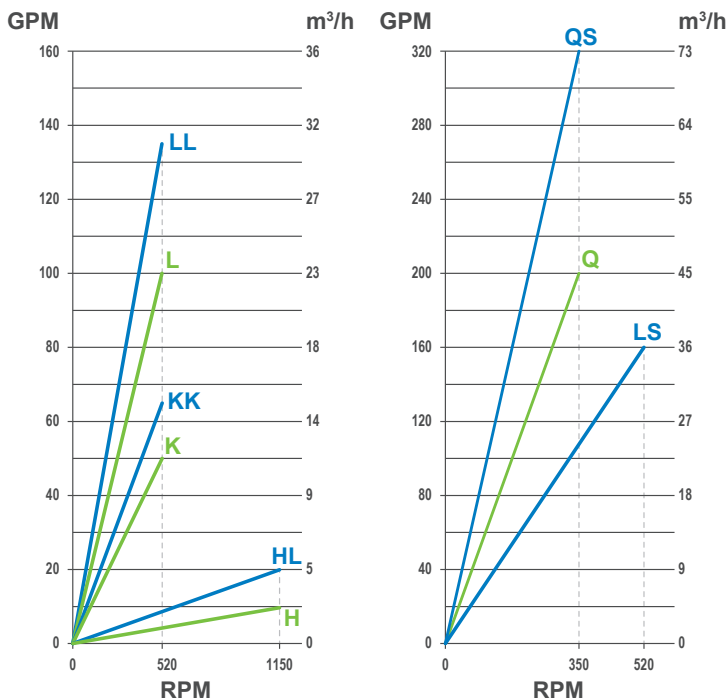

## PORTING

- Right Angle (90°) (Rotatable Casing), H-Q
- Opposite (180°) (Rotatable Casing), QS
- NPT, H & HL
- Flanged (ANSI), K-QS

## SEALING

- Packing
- O-Pro® Seal
- Component Mechanical Seal
- Cartridge Mechanical Seal
- Cartridge Triple Lip Seal

## MOUNTING

- Foot Mount

## OPTIONS

- Jacketing (Series 227C, 1227C, 4227C)

## DRIVES

- Offset Gear Reducer Drive
- Purchased Gear Reducer Drive
- Direct-Mounted Drive, H, HL
- V-Belt Drive

## TYPICAL APPLICATIONS

- Soaps, Detergents & Surfactants
- Acids & Caustics
- Water-based Liquids
- Vegetable Oil
- General Chemicals

**VIKING PUMP®**

VIKING PUMP, INC.  
A Unit of IDEX Corporation  
406 State Street  
Cedar Falls, Iowa 50613 U.S.A.  
[vikingpump.com](http://vikingpump.com)

## CONTACT YOUR STOCKING DISTRIBUTOR TODAY



Michael Smith Engineers Limited  
Web: [www.michael-smith-engineers.co.uk](http://www.michael-smith-engineers.co.uk)  
Email: [info@michael-smith-engineers.co.uk](mailto:info@michael-smith-engineers.co.uk)  
Freephone: 0800 316 7891