# DRUM/BARREL PUMPS EF SERIES ATEX

## ATEX Certified Best Value Drum Pump

Sealless economy drum pump certified for containter-to-container transfer of flammables or combustibles.

- 316 stainless steel tube
- Air motor
- Perlast<sup>®</sup> (perfluoroelastomer/FFKM) o-rings
- Hose barb discharge connections
- 1.2 m grounded hose with grounded wire assembly
- ATEX Ex II 1/2G c IIB T3 certified

#### Applications:



Acetone, alcohol, toluene, xylene, mineral spirits, diesel fuel, kerosene, gasoline, etc.

### **Construction Specifications**


Pump Model	Construction Materials	Tube Diameter	Discharge	Hose Size	Maximum Temperature		Minimum Temperature		Tube Lengths
		in (cm)	Size & Type	in (cm)	°F	°C	°F	°C	in (cm)
EFS	316 SS, FKM, EPDM, Perlast, PTFE, ETFE, Ekonol	1-1/4 (3.2)	3/4" Hose Barb	3/4 (1.9)	212	100	5	-15	16" (41 cm) 27" (69 cm) 40" (102 cm) 48" (122 cm)

Perlast® is a registered trademark of Precision Polymer Engineering Limited.

#### **Performance Data**

Maximum Flow	Maximum Head	Maximum Specific	Maximum Viscosity
<u>Air</u> gpm (lpm)	<u>Air</u> ft (m)	Gravity	Air
4 (15)	6 (1.8)	1.6	50 cP

Explosion-proof Installation

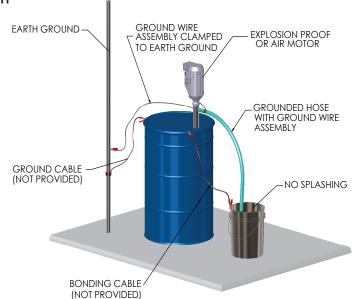

Use the handy online Pump Selector at www.finishthompson.com for help choosing a pump. SELECTOR DRWP PUMP

### **DRUM/BARREL PUMPS**

### **MOTOR DATA**



Air (S4A)

Model	Description	Description Certification Air Requirements		Output W	RPM	Maximum Viscosity cP	
ATEX Certified Electric Motors							
S4A	Lightweight. Operates from customer-supplied compressed air source. Variable speed. Muffler and control valve.	CE/ATEX EX II 2 GDc T4+1C <ta<+40c< td=""><td>up to 2.8 bar @ 12.7 lps</td><td>370</td><td>300-11,000</td><td>50</td></ta<+40c<>	up to 2.8 bar @ 12.7 lps	370	300-11,000	50	

### STATIC PROTECTION KIT



Description	Non-Wetted Materials	Hose ID	Hose OD	Fitting Size	Fitting Type
Synthetic rubber cross-linked polyethylene (XLPE) with brass hose fittings and grounding wire	Synthetic rubber with imbedded grounding wire	3/4″ (19.1 mm)	1.25″ (31.8 mm)	3/4″ (19.1 mm)	NPT or Barb

NOTE: ATEX compliance requires use of a Static Protection Kit.



### FINISH THOMPSON INC. - HEADQUARTERS

921 Greengarden Road | Erie, PA 16501 800.934.9384 | ph 814.455.4478 | fx 814.455.8518 email fti@finishthompson.com

### FINISH THOMPSON INC. - EUROPE CENTER

Otto-Hahn-Strasse 16 | Maintal, D-63477 Germany 49 (0)6181-90878-0 | fx 49 (0)6181-90878-18 email fti@finishthompson.com

OFFICIAL UK DISTRIBUTOR: Michael Smith Engineers Limited www.michael-smith-engineers.co.uk freephone: 0800 316 7891