


SURFACTANTS

Surfactants reduce the surface tension of the liquid in which they are dissolved. Commonly used in cleaning products to emulsify oils and hold dirt or other particulates in suspension. Also used in chemical processing like ethanol production.



SUGGESTED PUMPS:

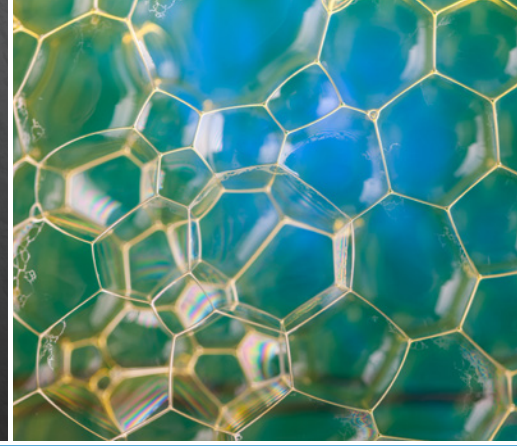

4127C SERIES™

- 316 Stainless Steel
- Cartridge lipseal sealing options
- Capacities to 320 GPM



1127C SERIES™

- 316 Stainless Steel
- O-Pro® Guard Seal
- Abrasive resistant sealing option
- Capacities to 320 GPM

SURFACTANT APPLICATIONS:

- Railcar unloading of feedstocks
- Transfer of process intermediaries
- Transfer of finished products

VIKING IN THE PROCESS:

Viking pumps are used throughout the surfactant manufacturing process. They are used in moving the raw ingredients such as oils and fats from the railcars to the plant. Viking pumps are used in both the saponification and sulfonation processes to move liquids like fatty acids, sulfonic acid and glycerin. They are also used in the blending and final packaging of the finished product. Viking pumps are able to handle a wide range of viscosities, have no pulsation, and flow rate can be adjusted easily with a variable frequency drive.

Note: O-Pro® seals are patented.

INTERESTED IN A PRODUCT? CONTACT YOUR STOCKING DISTRIBUTOR TODAY!

VIKING PUMP®



Michael Smith Engineers Limited

Web: www.michael-smith-engineers.co.uk | Email: info@michael-smith-engineers.co.uk | Freephone: 0800 316 7891



vikingpump.com/contact

© 06/2024 Viking Pump, Inc. All rights reserved.